




**Download**

DXF 2D  
- prof195.dxf

Montaggi  
- PROFESSIONAL\_GLOSSY rev1.pdf

## Professional 2 glossy

Housing: in die cast aluminium.  
Reflector: optics in aluminium to optimise light efficiency. Lens: in PMMA with high efficiency output and very low glare rate. Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings. Coating: dust painted, using polyester epoxy paint to withstand UV rays. Standard supply: Includes adjustable steel bracket. luminous flux maintenance L80B20: 50.000h. Power factor >0.9. Photobiological safety class: Exempt group

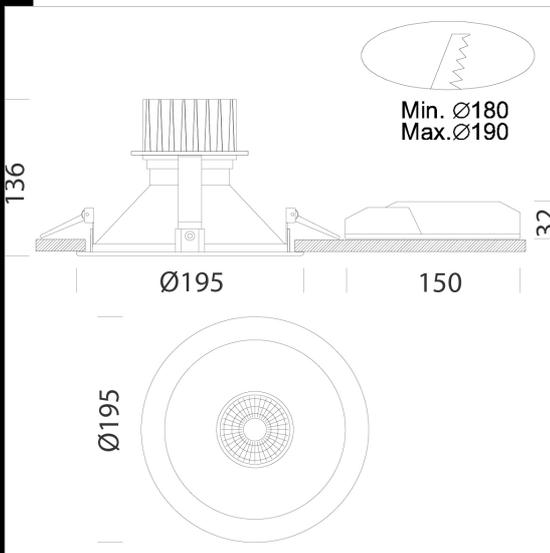

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22117610-00	CLD CELL	0.87	LED COB-3402lm-3000K-60°-CRI 93	32 W	WHITE
22117611-00	CLD CELL	1.01	LED COB-3582lm-4000K-60°-CRI 93	32 W	WHITE
22117612-00	CLD CELL	1.03	LED COB-3898lm-3000K-60°-CRI 93	39 W	WHITE
22117613-00	CLD CELL	1.01	LED COB-3950lm-4000K-60°-CRI 93	34 W	WHITE

### Accessories



- EM Kit R

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated