

## Download

DXF 2D  
- prof195.dxf




## Professional 2 glossy - Tunable white

Housing: in die cast aluminium.

Reflector: optics in aluminium to optimise light efficiency. Lens: in PMMA with high efficiency output and very low glare rate. Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings. Coating: dust painted, using polyester epoxy paint to withstand UV rays. Standard supply: Includes adjustable steel bracket. luminous flux maintenance L80B20: 50.000h. Power factor >0.9. Photobiological safety class: Exempt group

Tunable White system for Downlights with adjustable colour temperature from 2,700 to 6,500 K at constant luminous flux. Ideal for retail, public spaces (hotels and restaurants), corridors, stairs, applications.

Functions: • Constant light output function (CLO) • switchDIM and colourSWITCH with memory function; • colourSWITCH with 9 predefined colours; • Configurable via DALI;

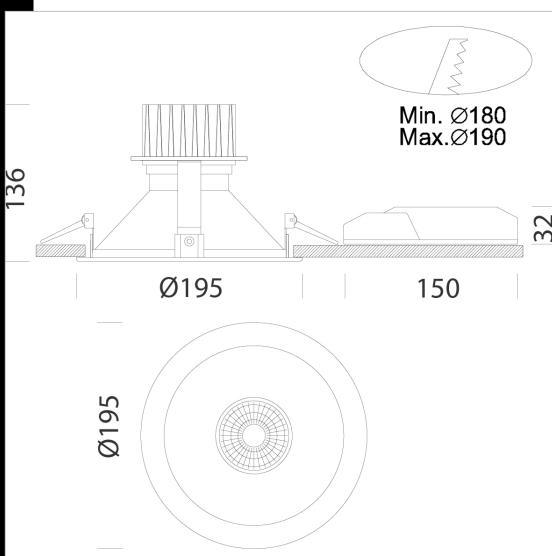

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22119201-00	CLD CELL-D-D	1,11	LED COB-3000lm-2700-6500K-CRI>90	31 W	BIANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated