


#### Download

DXF 2D  
- toledo.dxf


Montaggi  
- TOLEDO rev1.pdf

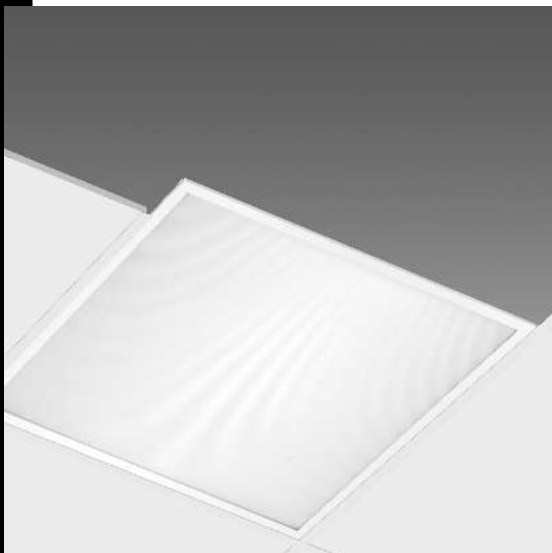

#### Toledo - UGR<19

Housing and frame: housing in galvanised steel sheet, and frame in aluminium, contact mounting on the cross T structure. Diffuser: in prismatic engineering plastic with high thermal transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened. UGR glare index: UGR<19 (in any situation). - EN 12464. Low Flicker: product with a very low flicker; uniform light for greater eye protection.

LED: power factor 0.95. Luminous flux maintenance 80%; 35.000h (L80B20). Photobiological safety class: exempt group.

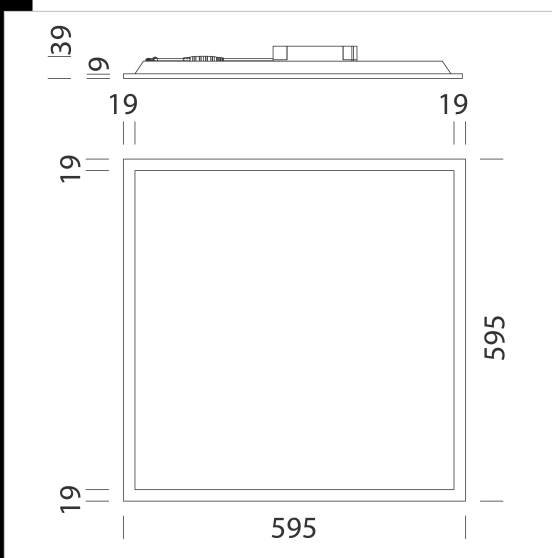

| Code        | Gear | Kg   | Lumen Output-K-CRI      | WTot | Colour |
|-------------|------|------|-------------------------|------|--------|
| 22150310-00 | CLD  | 1,83 | LED-3671lm-4000K-CRI 83 | 39 W | WHITE  |
| 22150310-39 | CLD  | 1,90 | LED-3414lm-3000K-CRI 80 | 39 W | WHITE  |

#### Accessori



- EM Kit R



- Frame for Toledo



- Recessed springs - Toledo

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated