
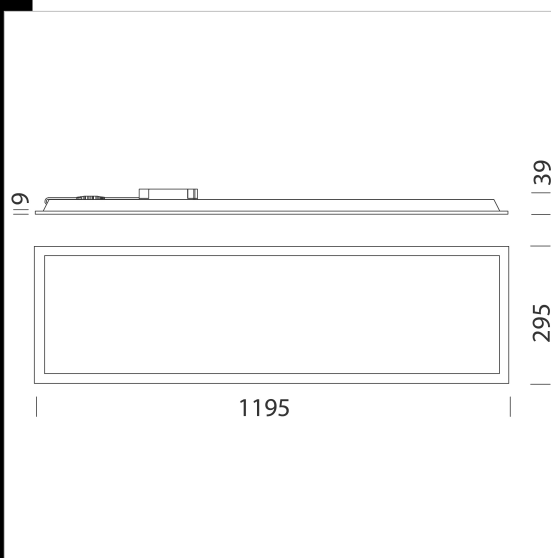


Download

DXF 2D
- toledor2.dxf

Montaggi
- TOLEDO rev1.pdf

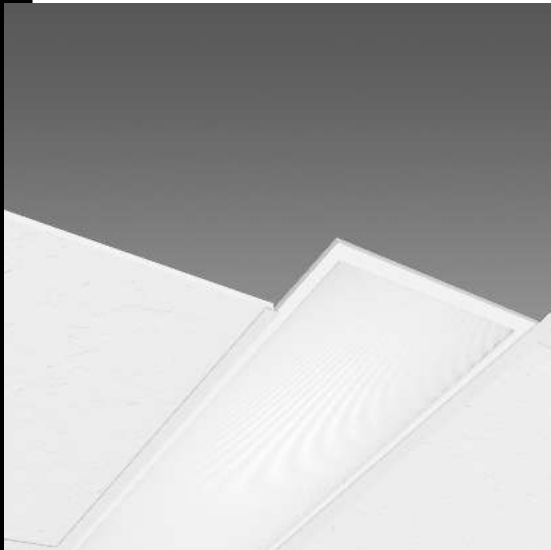

Toledo R2 - UGR<19

Housing and frame: housing in galvanised steel sheet, and frame in aluminium, contact mounting on the cross T structure. Diffuser: in prismatic engineering plastic with high thermal transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened. UGR glare index: UGR<19 (in any situation). - EN 12464. Low Flicker: product with a very low flicker; uniform light for greater eye protection.

LED: power factor 0.95. Luminous flux maintenance 80%; 35.000h (L80B20). Photobiological safety class: exempt group.

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22150410-00	CLD	2,03	LED-3671lm-4000K-CRI 80	39 W	WHITE
22150410-39	CLD	1,98	LED-3414lm-3000K-CRI 80	39 W	WHITE

Accessori



- EM Kit R



- Frame for Toledo



- Recessed springs - Toledo

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated