




## Download


DXF 2D  
- toledor3.dxf

Montaggi  
- TOLEDO rev1.pdf

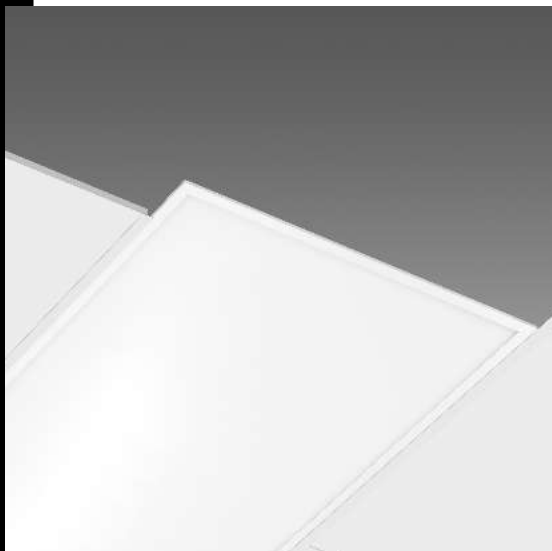

## Toledo R4 - UGR<22

Housing and frame: housing in galvanised steel sheet, and frame in aluminium, contact mounting on the cross T structure. Diffuser: in opal engineering plastic with high transmittance. Wiring: rapid wiring connection, the fixture does not need to be opened. Diffuser: in opal engineering plastic with high transmittance. LED: power factor 0.95. Luminous flux maintenance 80%; 35.000h (L80B20). Photobiological safety class: exempt group.

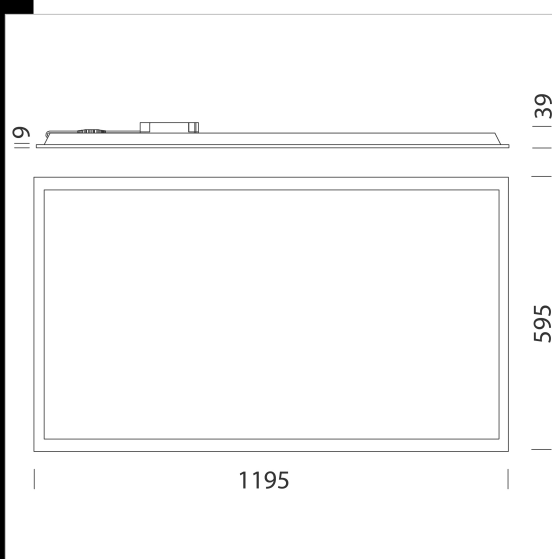

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22150810-00	CLD	3,86	LED-8750lm-4000K-CRI 80	78 W	WHITE
22150810-39	CLD	3,86	LED-8138lm-3000K-CRI 80	78 W	WHITE

## Accessori



- EM Kit R



- Frame for Toledo



- Recessed springs - Toledo

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated