




**Download**  
 DXF 2D  
 - offi12.dxf  
 Montaggi  
 - OFFICE\_1\_rev5.pdf  
 BIM  
 - Office 1 Dark - white rim - 20200714.zip




## Office 1 Dark - white rim

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT  
 Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.  
 Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.  
 Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings  
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.  
 LED 2000/3000  
 Luminous flux maintenance 70%: 60.000h (L70B10).  
 LED COB  
 Power factor: >0,95  
 Luminous flux maintenance 80%: 50.000h (L80B20).  
 Photobiological safety class: exempt group EN62471.

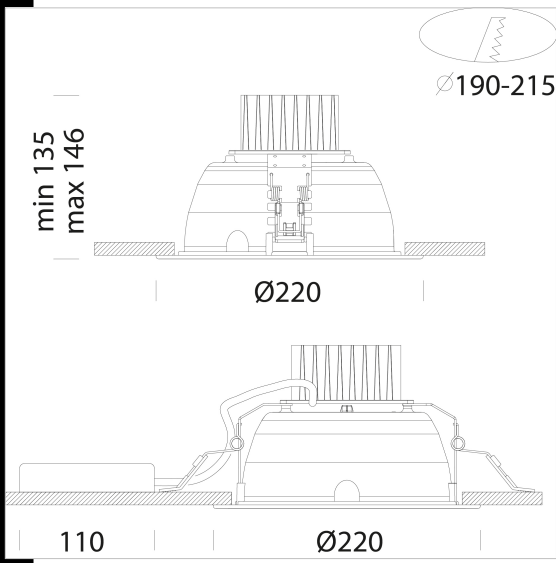

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152311-00	CLD	1.75	LED 2000-2076lm-4000K-CRI 80	20 W	WHITE
22152312-00	CLD	1.65	LED 3000-3047lm-4000K-CRI 80	27 W	WHITE
22152314-00	CLD	0.92	LED COB-2916lm-4000K-CRI>90	31 W	WHITE
22152315-00	CLD	0.93	LED COB-3384lm-4000K-CRI>90	38 W	WHITE
22152311-1241	CLD-D-D	1.75	LED 2000-2076lm-4000K-CRI 80	20 W	WHITE
22152312-1241	CLD-D-D	1.70	LED 3000-3047lm-4000K-CRI 80	27 W	WHITE
22152314-1241	CLD-D-D	0.99	LED COB-2916lm-4000K-CRI>90	31 W	WHITE
22152315-1241	CLD-D-D	0.99	LED COB-3384lm-4000K-CRI>90	38 W	WHITE
22152311-9441	CLD-D-D-E	1.40	LED 2000-2076lm-4000K-CRI 80	20 W	WHITE
22152312-9441	CLD-D-D-E	2.15	LED 3000-3047lm-3000K-CRI 80	27 W	WHITE
22152314-9441	CLD-D-D-E	1.45	LED COB-2916lm-4000K-CRI>90	31 W	WHITE
22152315-9441	CLD-D-D-E	2.00	LED COB-3384lm-4000K-CRI>90	38 W	WHITE

### Accessories

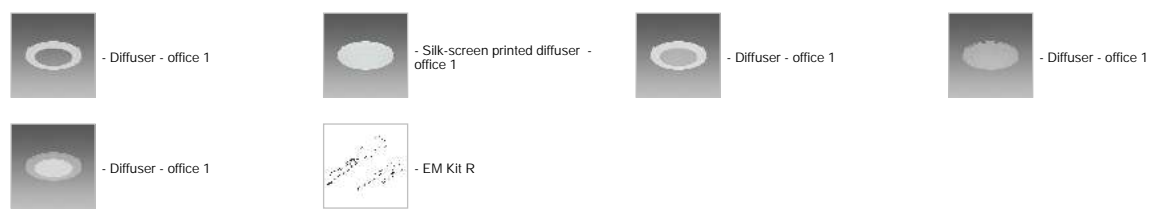

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated