

## Office 1 Dark

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED 2000/3000


Luminous flux maintenance 70%: 60.000h (L70B10).

LED COB


Power factor: >0,95

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

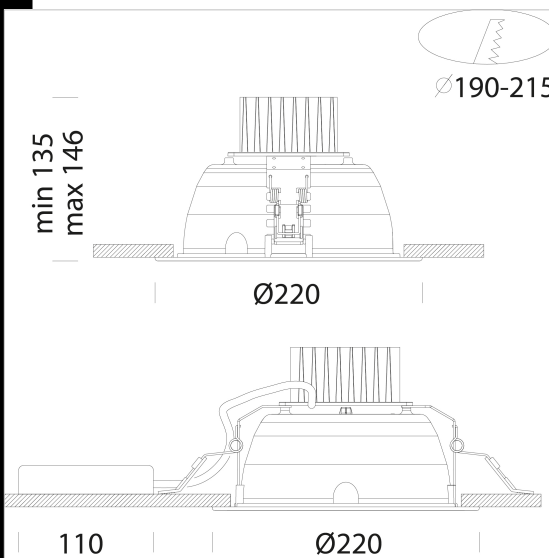

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152371-00	CLD CELL	1.70	LED 2000-1888lm-3000K-CRI 80	20 W	SILVER
22152375-00	CLD CELL	1.70	LED 2000-2076lm-4000K-CRI 80	20 W	SILVER
22152372-00	CLD CELL	1.60	LED 3000-2770lm-3000K-CRI 80	27 W	SILVER
22152374-00	CLD CELL	1.70	LED 3000-3047lm-4000K-CRI 80	27 W	SILVER
22152371-09	CLD CELL-E	2.20	LED 2000-1888lm-3000K-CRI 80	20 W	SILVER
22152375-09	CLD CELL-E	2.20	LED 2000-2076lm-4000K-CRI 80	20 W	SILVER
22152372-09	CLD CELL-E	2.07	LED 3000-2770lm-3000K-CRI 80	27 W	SILVER
22152374-09	CLD CELL-E	2.20	LED 3000-3047lm-4000K-CRI 80	27 W	SILVER
22152371-1241	CLD CELL-D-D	1.75	LED 2000-1888lm-3000K-CRI 80	20 W	SILVER
22152375-1241	CLD CELL-D-D	1.60	LED 2000-2076lm-4000K-CRI 80	20 W	SILVER
22152372-1241	CLD CELL-D-D	1.63	LED 3000-2770lm-3000K-CRI 80	27 W	SILVER
22152374-1241	CLD CELL-D-D	1.80	LED 3000-3047lm-4000K-CRI 80	27 W	SILVER
22152375-9441	CLD CELL-D-D-E	2.15	LED 2000-2076lm-4000K-CRI 80	20 W	SILVER
22152371-9441	CLD CELL-D-D-E	2.10	LED 2000-1888lm-3000K-CRI 80	20 W	SILVER
22152372-9441	CLD CELL-D-D-E	1.49	LED 3000-2770lm-3000K-CRI 80	27 W	SILVER
22152374-9441	CLD CELL-D-D-E	2.10	LED 3000-3047lm-4000K-CRI 80	27 W	SILVER
22152370-00	CLD CELL	0.93	LED COB-2701lm-3000K-CRI 92	32 W	SILVER
22152373-00	CLD CELL	0.91	LED COB-2831lm-4000K-CRI 92	32 W	SILVER
22152376-00	CLD CELL	0.92	LED COB-3228lm-3000K-CRI 92	39 W	SILVER
22152377-00	CLD CELL	0.91	LED COB-3384lm-4000K-CRI 92	39 W	SILVER
22152370-09	CLD CELL-E	1.41	LED COB-2701lm-3000K-CRI 92	32 W	SILVER
22152373-09	CLD CELL-E	1.40	LED COB-2831lm-4000K-CRI 92	32 W	SILVER
22152376-09	CLD CELL-E	2.00	LED COB-3228lm-3000K-CRI 92	39 W	SILVER
22152377-09	CLD CELL-E	1.39	LED COB-3384lm-4000K-CRI 92	39 W	SILVER
22152370-1241	CLD CELL-D-D	1.00	LED COB-2701lm-3000K-CRI 92	32 W	SILVER
22152373-1241	CLD CELL-D-D	0.97	LED COB-2831lm-4000K-CRI 92	32 W	SILVER
22152376-1241	CLD CELL-D-D	0.99	LED COB-3228lm-3000K-CRI 92	40 W	SILVER
22152377-1241	CLD CELL-D-D	2.00	LED COB-3384lm-4000K-CRI 92	39 W	SILVER
22152370-9441	CLD CELL-D-D-E	2.00	LED COB-2701lm-3000K-CRI 92	32 W	SILVER
22152373-9441	CLD CELL-D-D-E	1.52	LED COB-2831lm-4000K-CRI 92	32 W	SILVER
22152376-9441	CLD CELL-D-D-E	2.00	LED COB-3228lm-3000K-CRI 92	40 W	SILVER
22152377-9441	CLD CELL-D-D-E	2.00	LED COB-3384lm-4000K-CRI 92	39 W	SILVER

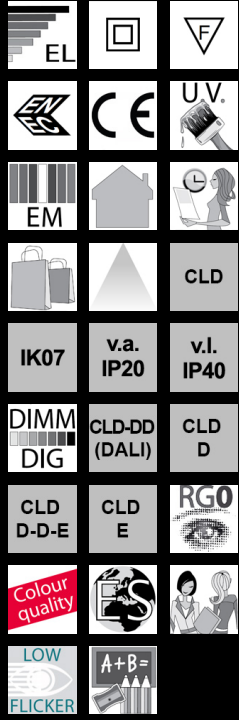

### Download

DXF 2D  
- off12.dxf

Montaggi  
- OFFICE\_1\_rev5.pdf

BIM  
- Office 1 Dark - 20200714.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

## Office 1 Dark

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152370-31	CLD CELL-E	2.00	LED COB-2701lm-3000K-CRI 92	32 W	SILVER
22152373-31	CLD CELL-E	2.00	LED COB-2831lm-4000K-CRI 92	32 W	SILVER
22152376-31	CLD CELL-E	2.00	LED COB-3228lm-3000K-CRI 92	40 W	SILVER
22152377-31	CLD CELL-E	2.00	LED COB-3384lm-4000K-CRI 92	40 W	SILVER

### Accessories



- Diffuser - office 1



- Silk-screen printed diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- - office 1



- Presence and light sensor

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated