

Office 1 Matt

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium matt coated through a C.V.D. hard-vacuum process for greater light control and efficiency.


Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: >0,95

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

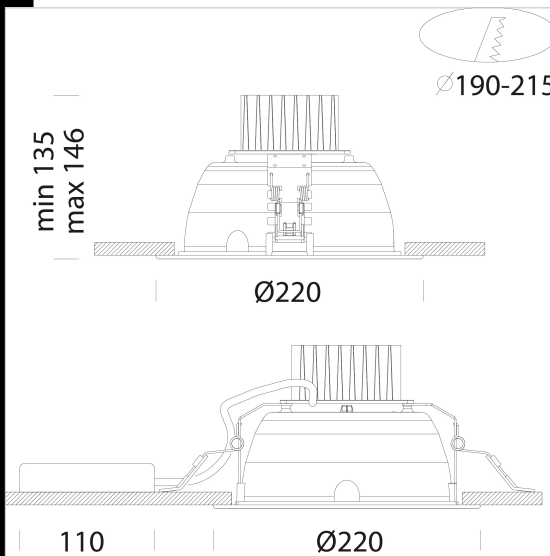

Download

DXF 2D
- off112.dxf

Montaggi
- OFFICE_1_rev5.pdf

BIM
- Office 1 Matt - 20200714.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152414-00	CLD CELL	1,10	LED COB-2488lm-4000K-CRI 92	19 W	SILVER
22152410-00	CLD CELL	1,10	LED COB-3172lm-4000K-CRI 92	25 W	SILVER
22152961-68	CLD CELL	1,10	LED COB-3479lm-4000K-CRI 92	32 W	SILVER
22152417-00	CLD CELL	1,25	LED COB-4804lm-4000K-CRI 92	39 W	SILVER
22152411-68	CLD CELL	0,95	LED COB-4230lm-4000K-CRI 92	39 W	SILVER
22152960-00	CLD CELL	1,90	LED COB-6734lm-4000K-CRI 92	69 W	SILVER
22152415-00	CLD CELL	1,10	LED COB-2197lm-3000K-CRI 92	18 W	SILVER
22152413-00	CLD CELL	1,10	LED COB-3084lm-3000K-CRI 92	26 W	SILVER
22152961-00	CLD CELL	1,60	LED 3000-3251lm-3000K-CRI 92	32 W	SILVER
22152416-00	CLD CELL	1,20	LED COB-4674lm-3000K-CRI 92	39 W	SILVER
22152411-00	CLD CELL	1,05	LED COB-3954lm-3000K-CRI 92	39 W	SILVER
22152960-39	CLD CELL	1,49	LED COB-6263lm-3000K-CRI 92	69 W	SILVER
22152412-00	CLD CELL	1,15	LED COB-3248lm-3500K-CRI 92	35 W	SILVER
22152414-1241	CLD CELL-D-D	1,10	LED COB-2488lm-4000K-CRI 92	19 W	SILVER
22152410-1241	CLD CELL-D-D	1,25	LED COB-3172lm-4000K-CRI 92	25 W	SILVER
22152961-6841	CLD CELL-D-D	1,63	LED COB-3479lm-4000K-CRI 92	32 W	SILVER
22152417-1241	CLD CELL-D-D	1,10	LED COB-4804lm-4000K-CRI 92	39 W	SILVER
22152411-6841	CLD CELL-D-D	1,10	LED COB-4230lm-4000K-CRI 92	39 W	SILVER
22152960-1241	CLD CELL-D-D	1,90	LED COB-6734lm-4000K-CRI 92	65 W	SILVER
22152415-1241	CLD CELL-D-D	1,15	LED COB-2197lm-3000K-CRI 93	19 W	SILVER
22152413-1241	CLD CELL-D-D	1,25	LED COB-3084lm-3000K-CRI 93	27 W	SILVER
22152961-1241	CLD CELL-D-D	1,25	LED COB-3251lm-3000K-CRI 92	32 W	SILVER
22152416-1241	CLD CELL-D-D	1,08	LED COB-4674lm-3000K-CRI 92	40 W	SILVER
22152411-1241	CLD CELL-D-D	1,45	LED COB-3954lm-3000K-CRI 92	40 W	SILVER
22152960-3941	CLD CELL-D-D	1,41	LED COB-6263lm-3000K-CRI 92	65 W	SILVER
22152412-1241	CLD CELL-D-D	1,25	LED COB-3248lm-3500K-CRI 92	35 W	SILVER
22152414-09	CLD CELL-E	1,10	LED COB-2488lm-4000K-CRI 92	19 W	SILVER
22152410-09	CLD CELL-E	1,60	LED COB-3172lm-4000K-CRI 92	25 W	SILVER
22152961-6809	CLD CELL-E	1,60	LED COB-3479lm-4000K-CRI 92	32 W	SILVER
22152417-09	CLD CELL-E	1,54	LED COB-4804lm-4000K-CRI 92	40 W	SILVER
22152411-6809	CLD CELL-E	1,45	LED COB-4230lm-4000K-CRI 92	39 W	SILVER
22152960-09	CLD CELL-E	1,60	LED COB-6734lm-4000K-CRI 92	69 W	SILVER

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Office 1 Matt

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152415-09	CLD CELL-E	1,45	LED COB-2197lm-3000K-CRI 92	18 W	SILVER
22152413-09	CLD CELL-E	1,45	LED COB-3084lm-3000K-CRI 92	26 W	SILVER
22152961-09	CLD CELL-E	1,45	LED COB-3251lm-3000K-CRI 92	32 W	SILVER
22152416-09	CLD CELL-E	1,45	LED COB-4674lm-3000K-CRI 92	40 W	SILVER
22152411-09	CLD CELL-E	1,60	LED COB-3954lm-3000K-CRI 92	40 W	SILVER
22152960-0928	CLD CELL-E	1,45	LED COB-6263lm-3000K-CRI 92	69 W	SILVER
22152412-09	CLD CELL-E	1,43	LED COB-3248lm-3500K-CRI 92	34 W	SILVER
22152414-31	CLD CELL-E	1,50	LED COB-2488lm-4000K-CRI 92	20 W	SILVER
22152410-31	CLD CELL-E	1,50	LED COB-3172lm-4000K-CRI 92	27 W	SILVER
22152961-3113	CLD CELL-E	1,50	LED COB-3479lm-4000K-CRI 92	32 W	SILVER
22152417-31	CLD CELL-E	1,50	LED COB-4804lm-4000K-CRI 92	40 W	SILVER
22152411-3113	CLD CELL-E	1,50	LED COB-4230lm-4000K-CRI 92	39 W	SILVER
22152960-31	CLD CELL-E	1,50	LED COB-6734lm-4000K-CRI 92	69 W	SILVER
22152415-31	CLD CELL-E	1,50	LED COB-2197lm-3000K-CRI 92	20 W	SILVER
22152413-31	CLD CELL-E	1,50	LED COB-3084lm-3000K-CRI 92	27 W	SILVER
22152961-31	CLD CELL-E	1,50	LED COB-3251lm-3000K-CRI 92	32 W	SILVER
22152416-31	CLD CELL-E	1,50	LED COB-4674lm-3000K-CRI 92	40 W	SILVER
22152411-31	CLD CELL-E	1,50	LED COB-3954lm-3000K-CRI 92	39 W	SILVER
22152960-3957	CLD CELL-E	2,19	LED COB-6263lm-3000K-CRI 92	69 W	SILVER
22152412-31	CLD CELL-E	1,50	LED COB-3248lm-3500K-CRI 92	35 W	SILVER

Accessori



- Diffuser - office 1



- Silk-screen printed diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- - office 1



- Presence and light sensor

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated