



Download

DXF 2D
- offi12.dxf

Montaggi
- OFFICE_1_rev5.pdf

BIM
- Office 1 Matt - 20200714.zip



Office 1 Matt

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium matt coated through a C.V.D. hard-vacuum process for greater light control and efficiency.


Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: >0,95

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

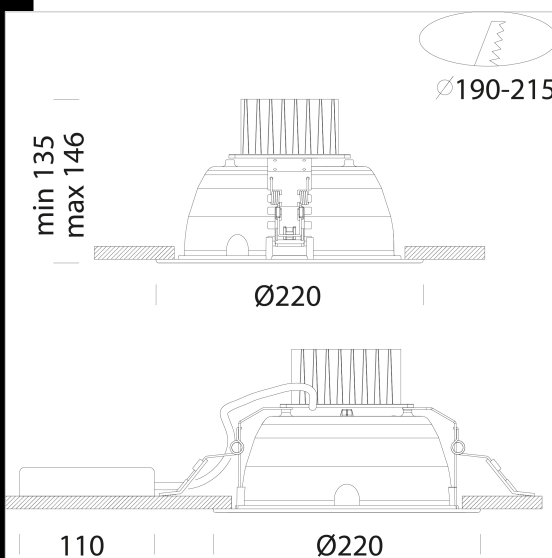

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152415-00	CLD	1,10	LED COB-2262lm-3000K-CRI>90	18 W	SILVER
22152414-00	CLD	1,10	LED COB-2563lm-4000K-CRI>90	18 W	SILVER
22152413-00	CLD	1,10	LED COB-3177lm-3000K-CRI>90	25 W	SILVER
22152410-00	CLD	1,10	LED COB-3267lm-4000K-CRI>90	25 W	SILVER
22152412-00	CLD	1,15	LED COB-3345lm-3500K-CRI>90	35 W	SILVER
22152961-00	CLD	1,60	LED 3000-3251lm-3000K-CRI>90	31 W	SILVER
22152416-00	CLD	1,20	LED COB-4674lm-3000K-CRI>90	38 W	SILVER
22152417-00	CLD	1,25	LED COB-4948lm-4000K-CRI>90	38 W	SILVER
22152411-00	CLD	1,05	LED COB-4073lm-3000K-CRI>90	39 W	SILVER
22152960-00	CLD	1,90	LED COB-6734lm-4000K-CRI>90	69 W	SILVER
22152415-1241	CLD-D-D	1,15	LED COB-2262lm-3000K-CRI>90	18 W	SILVER
22152414-1241	CLD-D-D	1,10	LED COB-2563lm-4000K-CRI>90	18 W	SILVER
22152413-1241	CLD-D-D	1,25	LED COB-3177lm-3000K-CRI>90	25 W	SILVER
22152410-1241	CLD-D-D	1,25	LED COB-3267lm-4000K-CRI>90	25 W	SILVER
22152412-1241	CLD-D-D	1,25	LED COB-3345lm-3500K-CRI>90	35 W	SILVER
22152961-1241	CLD CELL-D-D	1,25	LED COB-3251lm-3000K-CRI>90	32 W	SILVER
22152416-1241	CLD-D-D	1,08	LED COB-4674lm-3000K-CRI>90	38 W	SILVER
22152417-1241	CLD-D-D	1,10	LED COB-4948lm-4000K-CRI>90	38 W	SILVER
22152411-1241	CLD-D-D	1,45	LED COB-4073lm-3000K-CRI>90	40 W	SILVER
22152960-1241	CLD-D-D	1,90	LED COB-6734lm-4000K-CRI>90	65 W	SILVER

Accessori



- Diffuser - office 1



- Silk-screen printed diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- Presence and light sensor



- EM Kit R

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated