


Office 2 Dark

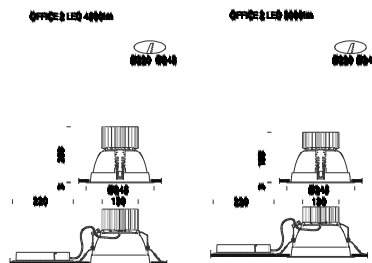

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22152510-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	27	LED SLM Gen IV-3000lm-3000K-CRI 80
22152511-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	44	LED SLM Gen IV-4500lm-3000K-CRI 80
22152510-1241	CLD CELLDD	1.20	aluminium	0x0x200 Ø245	27	LED COB 3000-3000lm-3000K-CRI 80
22152511-1241	CLD CELLDD	1.20	aluminium	0x0x200 Ø245	44	LED SLM Gen IV-4500lm-3000K-CRI 80
22152572-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	26	LED SLM Gen IV-3000lm-4000K-CRI 80
22152573-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	43	LED SLM Gen IV-4500lm-4000K-CRI 80
22152570-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	25	LED COB 3000-3000lm-4000K-CRI 80
22152571-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	46	LED COB 4700-4700lm-4000K-CRI 80
22152574-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	51	LED COB 5000 LG-5450lm-3000K-CRI 80
22152575-00	CLD CELL	1.20	aluminium	0x0x200 Ø245	52	LED COB 6000 LG-6000lm-4000K-CRI 80
22152572-1241	CLD CELLDD	1.20	aluminium	0x0x200 Ø245	26	LED SLM Gen IV-3000lm-4000K-CRI 80
22152573-1241	CLD CELLDD	1.20	aluminium	0x0x200 Ø245	43	LED SLM Gen IV-4500lm-4000K-CRI 80
22152574-1241	CLD CELLDD	1.20	aluminium	0x0x200 Ø245	51	LED COB 5000 LG-5450lm-3000K-CRI 80
22152575-1241	CLD CELLDD	1.20	aluminium	0x0x200 Ø245	52	LED COB 6000 LG-6000lm-4000K-CRI 80

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT
Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

Power factor: ≥ 0.95

Luminous flux maintenance 70% 50000h (L70B50)

LED SLM GEN IV 3000lm - 3000K/4000K - CRI80

LED SLM GEN IV 4500lm - 3000K/4000K - CRI80

LED COB 3000 - 3000lm - 4000K - CRI80

LED COB 4700 - 4700lm - 4000K - CRI80

LED COB 5000 LG - 5450lm - 4000K - CRI80

LED COB 6000 LG - 6000lm - 4000K - CRI80