

Office 2 Matt - UGR<19

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium matt coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 40 mm. thick false ceilings


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources DIMM 1/10V o DALI


Power factor: >0,95

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

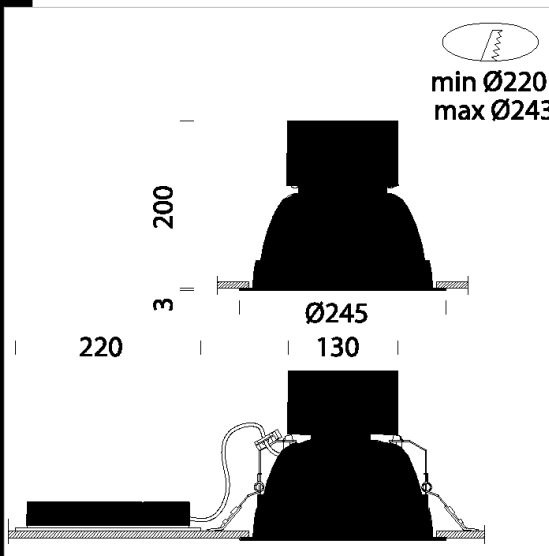

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152512-68	CLD CELL	1,11	LED COB-3193lm-4000K-CRI 92	26 W	SILVER
22152513-68	CLD CELL	1,12	LED COB-4831lm-4000K-CRI 92	39 W	SILVER
22152517-68	CLD CELL	1,05	LED COB-3193lm-4000K-CRI 92	28 W	SILVER
22152519-68	CLD CELL	1,50	LED COB-3614lm-4000K-CRI 92	34 W	SILVER
22152810-00	CLD CELL	2,30	LED COB-6925lm-4000K-CRI 92	69 W	SILVER
22152512-00	CLD CELL	1,20	LED COB-2984lm-3000K-CRI 92	26 W	SILVER
22152513-00	CLD CELL	1,40	LED COB-4515lm-3000K-CRI 92	39 W	SILVER
22152517-00	CLD CELL	1,04	LED COB-2984lm-3000K-CRI 92	26 W	SILVER
22152519-00	CLD CELL	1,50	LED COB-3378lm-3000K-CRI 92	34 W	SILVER
22152810-39	CLD CELL	1,57	LED COB-6440lm-3000K-CRI 92	69 W	SILVER
22152515-00	CLD CELL	1,35	LED COB-3248lm-3500K-CRI 92	35 W	SILVER
22152512-6841	CLD CELL-D-D	1,25	LED COB-3193lm-4000K-CRI 92	27 W	SILVER
22152513-6841	CLD CELL-D-D	1,40	LED COB-4831lm-4000K-CRI 92	40 W	SILVER
22152517-6841	CLD CELL-D-D	1,35	LED COB-3193lm-4000K-CRI 92	27 W	SILVER
22152519-6841	CLD CELL-D-D	1,40	LED COB-3614lm-4000K-CRI 92	34 W	SILVER
22152810-1241	CLD CELL-D-D	1,49	LED COB-6925lm-4000K-CRI 92	69 W	SILVER
22152512-1241	CLD CELL-D-D	1,25	LED COB-2984lm-3000K-CRI 93	27 W	SILVER
22152513-1241	CLD CELL-D-D	1,40	LED COB-4515lm-3000K-CRI 92	40 W	SILVER
22152817-1241	CLD CELL-D-D	1,40	LED COB-2984lm-3000K-CRI 92	27 W	SILVER
22152519-1241	CLD CELL-D-D	1,05	LED COB-3378lm-3000K-CRI 92	34 W	SILVER
22152810-3941	CLD CELL-D-D	1,48	LED COB-6440lm-3000K-CRI 92	69 W	SILVER
22152515-1241	CLD CELL-D-D	1,40	LED COB-3248lm-3500K-CRI 92	34 W	SILVER
22152512-6809	CLD CELL-E	1,48	LED COB-3193lm-4000K-CRI 92	27 W	SILVER
22152513-6809	CLD CELL-E	1,40	LED COB-4831lm-4000K-CRI 92	40 W	SILVER
22152517-6809	CLD CELL-E	1,41	LED COB-3193lm-4000K-CRI 92	26 W	SILVER
22152519-6809	CLD CELL-E	1,40	LED COB-3614lm-4000K-CRI 92	34 W	SILVER
22152810-09	CLD CELL-E	1,40	LED COB-6925lm-4000K-CRI 92	69 W	SILVER
22152517-09	CLD CELL-E	1,41	LED COB-2984lm-3000K-CRI 92	26 W	SILVER
22152512-09	CLD CELL-E	1,48	LED COB-2984lm-3000K-CRI 92	27 W	SILVER
22152513-09	CLD CELL-E	1,50	LED COB-4515lm-3000K-CRI 92	40 W	SILVER
22152519-09	CLD CELL-E	1,50	LED COB-3378lm-3000K-CRI 92	34 W	SILVER
22152810-0928	CLD CELL-E	1,50	LED COB-6440lm-3000K-CRI 92	69 W	SILVER

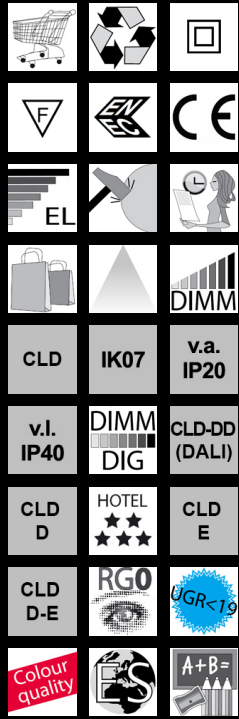

Download

DXF 2D
- off2matt2.dxf

Montaggi
- OFFICE 2 LED rev6.pdf

BIM
- Office 2 Matt - 20200714.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Office 2 Matt - UGR<19

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152515-09	CLD CELL-E	1,85	LED COB-3248lm-3500K-CRI 92	34 W	SILVER
22152513-3113	CLD CELL-E	1,50	LED COB-4831lm-4000K-CRI 92	40 W	SILVER
22152512-3113	CLD CELL-E	1,50	LED COB-3193lm-4000K-CRI 92	27 W	SILVER
22152517-3113	CLD CELL-E	1,50	LED COB-3193lm-4000K-CRI 92	27 W	SILVER
22152519-3113	CLD CELL-E	1,50	LED COB-3614lm-4000K-CRI 92	34 W	SILVER
22152810-31	CLD CELL-E	1,50	LED COB-6925lm-4000K-CRI 92	69 W	SILVER
22152512-31	CLD CELL-E	1,50	LED COB-2984lm-3000K-CRI 92	27 W	SILVER
22152513-31	CLD CELL-E	1,50	LED COB-4515lm-3000K-CRI 92	40 W	SILVER
22152517-31	CLD CELL-E	1,50	LED COB-2984lm-3000K-CRI 92	27 W	SILVER
22152519-31	CLD CELL-E	1,50	LED COB-3378lm-3000K-CRI 92	34 W	SILVER
22152810-3957	CLD CELL-E	1,50	LED COB-6440lm-3000K-CRI 92	69 W	SILVER
22152515-31	CLD CELL-E	1,50	LED COB-3248lm-3500K-CRI 92	35 W	SILVER
22152517-1241	CLD CELL-D-D	1,35	LED COB-2984lm-3000K-CRI 92	27 W	SILVER

Accessori


- Louvre Office 2/3/4/6/9 - clear



- Louvre Office 2/3/4/6/9 - Opal



- Diffuser - Office 2/3/4/6/9



- Diffuser - office 2/3/4/6/9



- Diffuser - office 2/3/4/6/9



- Presence and light sensor

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated