


Office 2 Matt

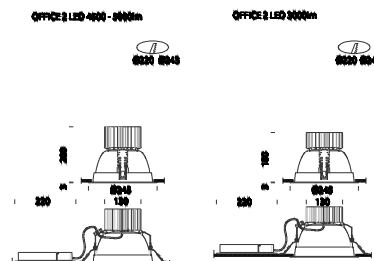

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22152512-00	CLD CELL	1.20	Glazed	0x0x200 Ø245	26	LED SLM Gen IV-3000lm-3000K-CRI 80
22152513-00	CLD CELL	1.20	Glazed	0x0x200 Ø245	38	LED SLM Gen IV-4500lm-3000K-CRI 80
22152515-00	CLD CELL	1.10	Glazed	0x0x200 Ø245	49	LED COB SHARP XFC-4500lm-4000K-CRI 92
22152517-00	CLD CELL	1.20	Glazed	0x0x200 Ø245	26	LED COB LG-3000lm-3000K-CRI 80
22152519-00	CLD CELL	1.20	Glazed	0x0x200 Ø245	38	LED COB-4800lm-3000K-CRI 80
22152512-12	CLD CELL-D	1.20	Glazed	0x0x200 Ø245	26	LED COB-3000lm-3000K-CRI 80
22152513-12	CLD CELL-D	1.20	Glazed	0x0x200 Ø245	38	LED SLM Gen IV-4500lm-3000K-CRI 80
22152515-12	CLD CELL-D	1.10	Glazed	0x0x200 Ø245	49	LED COB SHARP XFC-4500lm-4000K-CRI 92
22152517-12	CLD CELL-D	1.20	Glazed	0x0x200 Ø245	26	LED COB LG-3000lm-3000K-CRI 80
22152519-12	CLD CELL-D	1.20	Glazed	0x0x200 Ø245	38	LED COB-4800lm-3000K-CRI 80
22152810-00	CLD CELL	1.20	Glazed	0x0x200 Ø245	67	LED COB CREE-7700lm @ 1400mA-4000K-CRI 80
22152512-1241	CLD CELLDD	1.20	Glazed	0x0x200 Ø245	29	LED SLM Gen IV-3000lm-3000K-CRI 80
22152513-1241	CLD CELLDD	1.20	Glazed	0x0x200 Ø245	42	LED SLM Gen IV-4500lm-3000K-CRI 80

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium matt coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources DIMM 1/10V o DALI

LED SLM GEN IV 3000lm - 3000K - CRI80

LED SLM GEN IV 4500lm - 3000K - CRI80

LED COB SHAP XFC 4400lm - 4000K - CRI92

LED COB LG - 3000lm - 3000K - CRI80

LED COB 38W - 4800lm - 3000K - CRI80

LED COB CREE 67W - 7700lm - 4000K - CRI80

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.