

Office 2 Matt

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium matt coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources DIMM 1/10V o DALI

LED SLM GEN IV 25W - 3000lm - 3000K - CRI80

LED SLM GEN IV 36W 4500lm - 3000K - CRI80

LED COB SHARP white 33W - 3400lm - 3500K - CRI92

LED COB 25W - 3000lm - 3000K - CRI92


LED COB 32W - 4800lm - 3000K - CRI80

LED COB CREE 67W - 8200lm - 4000K - CRI80

Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

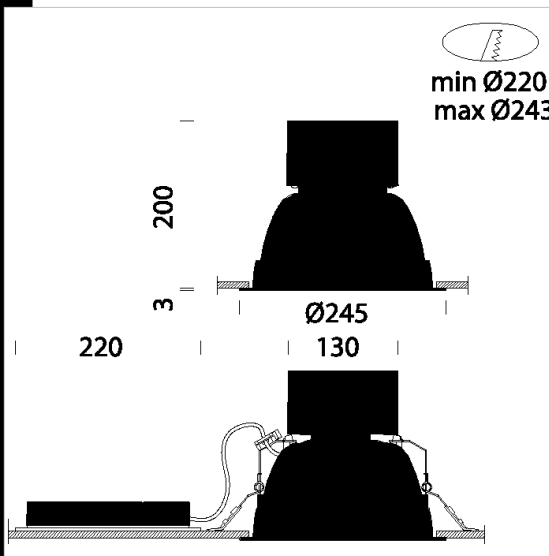

| Code | Gear | Kg | Watt | Base | Lamps | Colour |
|---------------|--------------|------|-------------------------|------|---------------------|--------|
| 22152512-00 | CLD CELL | 1,20 | LED SLM Gen IV 25W | - | 3000lm-3000K-CRI 80 | SILVER |
| 22152513-12 | CLD CELL-D | 1,40 | LED SLM Gen IV 36W | - | 4500lm-3000K-CRI 80 | SILVER |
| 22152519-12 | CLD CELL-D | 1,15 | LED COB 32W | - | 4800lm-3000K-CRI 80 | SILVER |
| 22152512-12 | CLD CELL-D | 1,10 | LED COB 25W | - | 3000lm-3000K-CRI 92 | SILVER |
| 22152512-1241 | CLD CELL-D-D | 1,25 | LED SLM Gen IV 25W | - | 3000lm-3000K-CRI 80 | SILVER |
| 22152513-00 | CLD CELL | 1,40 | LED SLM Gen IV 36W | - | 4500lm-3000K-CRI 80 | SILVER |
| 22152513-1241 | CLD CELL-D-D | 1,40 | LED SLM Gen IV 36W | - | 4500lm-3000K-CRI 80 | SILVER |
| 22152515-00 | CLD CELL | 1,35 | LED COB sharp white 33W | - | 3400lm-3500K-CRI 92 | SILVER |
| 22152517-00 | CLD CELL | 1,04 | LED COB 25W | - | 3000lm-3000K-CRI 80 | SILVER |
| 22152517-12 | CLD CELL-D | 1,00 | LED COB 25W | - | 3000lm-3000K-CRI 80 | SILVER |
| 22152517-09 | CLD CELL-E | 1,15 | LED COB 25W | - | 3000lm-3000K-CRI 92 | SILVER |
| 22152517-94 | CLD CELL-D-E | 1,15 | LED COB 25W | - | 3000lm-3000K-CRI 92 | SILVER |
| 22152519-00 | CLD CELL | 1,50 | LED COB 32W | - | 4800lm-3000K-CRI 80 | SILVER |
| 22152810-00 | CLD CELL | 2,30 | LED COB CREE 67W | - | 8200lm-4000K-CRI 80 | SILVER |

Accessories



- Louvre Office 2/3/4/6/9 - clear



- Diffuser - office 2/3/4/6/9



- Presence and light sensor



- Diffuser - office 2/3/4/6/9



- Diffuser - Office 2/3/4/6/9



- Louvre Office 2/3/4/6/9 - Opal

- DIMM** **CLD** **HOTEL**
- DIG** **CELLDE** **☆☆☆**
- CLD** **CELL**
-
-
-
- CE**
-
- EL**
-
-
-
-
-
- DIMM** **UGR<19** **Colour quality**
- CLD** **v.l.** **IK07**
- CELLD** **IP40**
- DIG** **IK07**
-
- CLD** **RG0**
- CELL-D**
- CLD** **v.a.**
- CELL-E** **IP20**

Download

DXF 2D
- off2matt.dxf

Montaggi
- office2.pdf