



Office 2 Dark

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources DIMM 1/10V o DALI

LED SLM GEN IV 25W - 3000lm - 4000K - CRI80

LED SLM GEN IV 36W - 4500lm - 4000K - CRI80

LED COB 25W - 3000lm - 4000K - CRI92

LED COB 32W - 4800lm - 4000K - CRI92


LED COB 38W - 5450lm - 4000K - CRI80

LED COB CREE 52W - 6800lm - 4000K -

LED COB CREE 67
Power factor: >0,95

Luminous flux maintenance 70% 50000h (L70B50)

Photobiological safety class: exempt group EN62471.

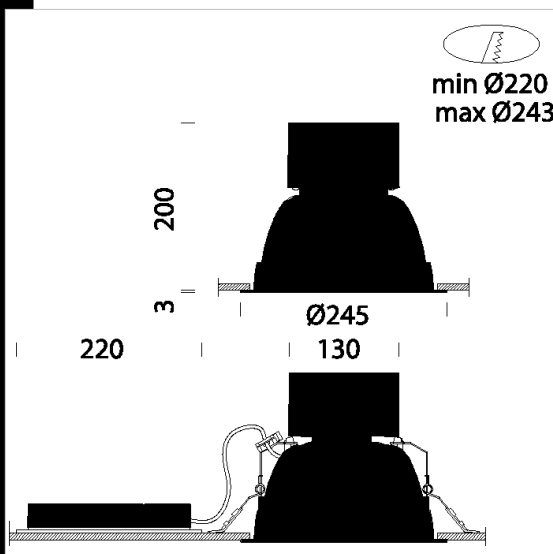

Code	Gear	Kg	Watt	Base	Lamps	Colour
22152574-1241	CLD CELL-D-D	1,50	LED COB 38W	-	5450lm-4000K-CRI 80	SILVER
22152575-1241	CLD CELL-D-D	1,60	LED COB CREE 52W	-	6800lm-4000K-CRI 80	SILVER
22152572-00	CLD CELL	1,35	LED SLM Gen IV 25W	-	3000lm-4000K-CRI 80	SILVER
22152572-1241	CLD CELL-D-D	1,35	LED SLM Gen IV 25W	-	3000lm-4000K-CRI 80	SILVER
22152573-00	CLD CELL	1,35	LED SLM Gen IV 36W	-	4500lm-4000K-CRI 80	SILVER
22152573-1241	CLD CELL-D-D	1,55	LED SLM Gen IV 36W	-	4500lm-4000K-CRI 80	SILVER
22152570-00	CLD CELL	1,03	LED COB 25W	-	3000lm-4000K-CRI 92	SILVER
22152570-12	CLD CELL-D	1,03	LED COB 25W	-	3000lm-4000K-CRI 92	SILVER
22152570-94	CLD CELL-D-E	1,03	LED COB 25W	-	3000lm-4000K-CRI 92	SILVER
22152570-09	CLD CELL-E	1,50	LED COB 25W	-	3000lm-4000K-CRI 92	SILVER
22152571-00	CLD CELL	1,15	LED COB 32W	-	4800lm-4000K-CRI 92	SILVER
22152571-12	CLD CELL-D	1,15	LED COB 32W	-	4800lm-4000K-CRI 92	SILVER
22152571-09	CLD CELL-E	1,75	LED COB 32W	-	4800lm-4000K-CRI 92	SILVER
22152811-00	CLD CELL	2,30	LED COB CREE 67W	-	8200lm-4000K-CRI 80	SILVER
22152571-94	CLD CELL-D-E	1,75	LED COB 32W	-	4800lm-4000K-CRI 92	SILVER
22152574-00	CLD CELL	1,15	LED COB 38W	-	5450lm-4000K-CRI 80	SILVER
22152575-00	CLD CELL	1,60	LED COB CREE 52W	-	6800lm-4000K-CRI 80	SILVER

Accessories



- Louvre Office 2/3/4/6/9 - clear



- Diffuser - office 2/3/4/6/9



- Presence and light sensor



- Diffuser - office 2/3/4/6/9



- Diffuser - Office 2/3/4/6/9



- Louvre Office 2/3/4/6/9 - Opal