

Office 1 Total white

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate.


Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: >0,95

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

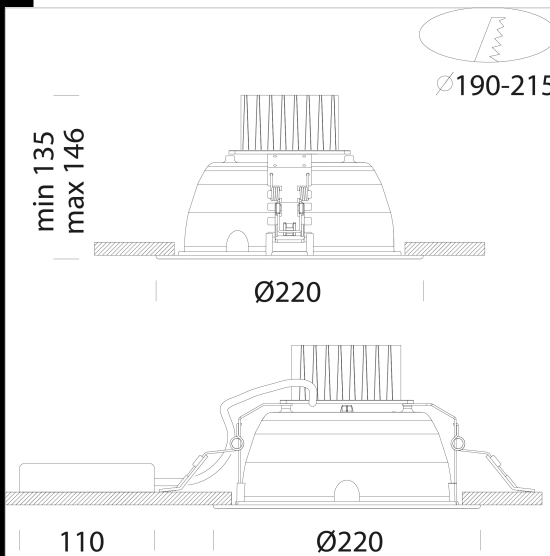

Download

DXF 2D

- offi12.dxf

Montaggi

- OFFICE_1_rev5.pdf

BIM

- Office 1 Total white - 20200714.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152715-00	CLD	1,00	LED COB-2184lm-3000K-CRI>90	18 W	WHITE
22152714-00	CLD	1,00	LED COB-2275lm-4000K-CRI>90	18 W	WHITE
22152713-00	CLD	1,25	LED COB-2820lm-3000K-CRI>90	25 W	WHITE
22152710-00	CLD	1,00	LED COB-2900lm-4000K-CRI>90	25 W	WHITE
22152712-00	CLD	1,20	LED COB-3345lm-3500K-CRI>90	35 W	WHITE
22152718-00	CLD	1,06	LED 3000-3296lm-3000K-CRI>90	31 W	WHITE
22152716-00	CLD	1,10	LED SLM-4390lm-3000K-CRI>90	38 W	WHITE
22152717-00	CLD	1,20	LED SLM-4724lm-4000K-CRI>90	38 W	WHITE
22152711-00	CLD	1,23	LED COB-3979lm-3000K-CRI>90	39 W	WHITE
22152910-00	CLD	1,75	LED COB-6617lm-4000K-CRI>90	69 W	WHITE
22152715-1241	CLD-D-D	1,00	LED COB-2184lm-3000K-CRI>90	18 W	WHITE
22152714-1241	CLD-D-D	1,10	LED COB-2275lm-4000K-CRI>90	18 W	WHITE
22152713-1241	CLD-D-D	1,00	LED COB-2820lm-3000K-CRI>90	25 W	WHITE
22152710-1241	CLD-D-D	1,00	LED COB-2900lm-4000K-CRI>90	25 W	WHITE

Accessori



- Diffuser - office 1



- Silk-screen printed diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- Diffuser - office 1



- EM Kit R

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated