


Office 1 Dark - IP44

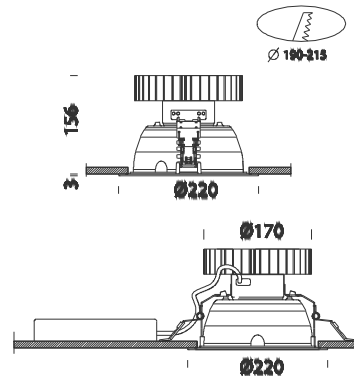

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22153170-00	CLD CELL	1.10	aluminium	0x0x195 Ø220	46	LED DLM FLEX 5000-5000lm-3000K-CRI 80
22153171-00	CLD CELL	1.10	aluminium	0x0x195 Ø220	42	LED DLM FLEX 5000-5000lm-4000K-CRI 80

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Diffuser: in polycarbonate anti-glare

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources 5000lm - 3000/4000K - 50/46W - CRI80

Power factor: >0,95

Luminous flux maintenance 70% 60000h (L70B50)

Photobiological safety class: exempt group EN62471.