



Office 3 Dark - FLC LED - white rim

A family of fixtures designed to combine high energy saving with excellent light quality, to address diverse needs concerning both safety and maintenance. The fixture's design is extremely clean and functional. Manufactured in accordance with standards EN12464 for VDT

Housing: Vandal-resistant, V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Equipment: Includes stainless steel springs ensuring perfect adherence to 1 to 20 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


FLC LED 2x8,5W - 4000K - 2x950lm- CRI83

FLC LED integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting application: it meets basic lighting requirements, offers significant energy saving, and is environmentally friendly.

Power factor: >0,9

Luminous flux maintenance 70% 30000h (L70B50)

Photobiological safety class: exempt group EN62471.

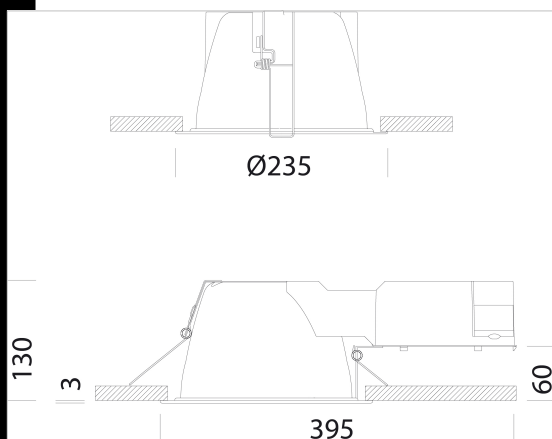

Code	Gear	Kg	Watt	Base	Lamps	Colour
22153210-00	CLD CELL	1,31	LC LED 2x8.5W		2x950lm-4000K-CRI 83	WHITE

Download

DXF 2D
- office3.dxf