




**Download**

DXF 2D  
- slimlex2.dxf



**Slim Lex 3.0 B**

Housing: in die cast aluminium  
Diffuser: panel in PMMA, with laser silk-screening suitably dimensioned based on the power level of the LED  
Painting: dust painted, using polyester epoxy paint to withstand UV rays.  
Standard supply: Includes adjustable steel bracket.  
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.  
Power factor: 0.9  
Photobiological safety class: Exempt group.  
Luminous flux maintenance 70%: 25.000h (L70B50).  
recessed Ø 205/220mm

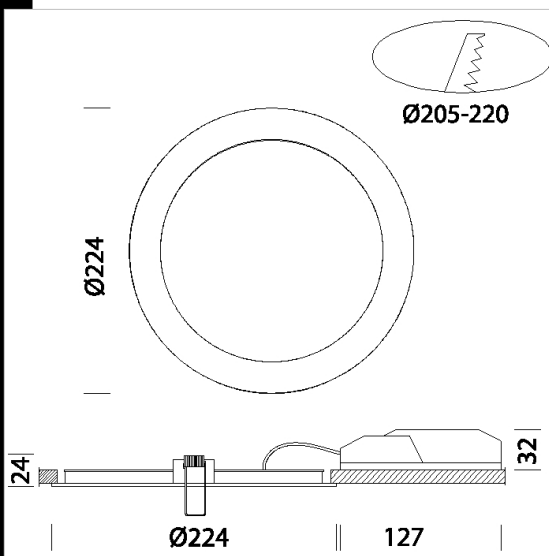

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22159514-00	CLD	0,70	LED-2100lm-4000K-CRI>80	19 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated