


Velvet 5 - COB



Housing: in die cast aluminium with glass
 Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.
 Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 80%: 60.000h (L80B20).
 recessed Ø 180/190mm

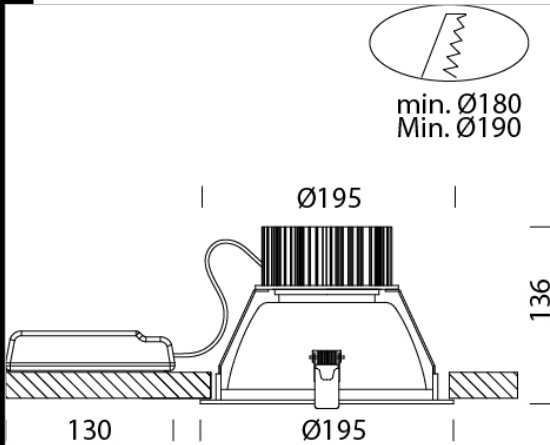

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22160510-00	CLD CELL	1,02	LED COB-2898lm-3000K-90°-CRI 92	32 W	WHITE
22160511-00	CLD CELL	1,02	LED COB-3095lm-4000K-90°-CRI 92	32 W	WHITE
22160512-00	CLD CELL	1,02	LED COB-3594lm-3000K-90°-CRI 92	39 W	WHITE
22160513-00	CLD CELL	1,02	LED COB-3838lm-4000K-90°-CRI 92	39 W	WHITE
22160510-1241	CLD CELL-D-D	1,00	LED COB-2898lm-3000K-90°-CRI 92	32 W	WHITE
22160511-1241	CLD CELL-D-D	1,00	LED COB-3095lm-4000K-90°-CRI 92	32 W	WHITE
22160512-1241	CLD CELL-D-D	1,00	LED COB-3594lm-3000K-90°-CRI 92	40 W	WHITE
22160513-1241	CLD CELL-D-D	1,06	LED COB-3838lm-4000K-90°-CRI 92	39 W	WHITE
22160510-09	CLD CELL-E	1,50	LED COB-2898lm-3000K-90°-CRI 92	32 W	WHITE
22160511-09	CLD CELL-E	1,50	LED COB-3095lm-4000K-90°-CRI 92	32 W	WHITE
22160512-09	CLD CELL-E	1,50	LED COB-3594lm-3000K-90°-CRI 92	40 W	WHITE
22160513-09	CLD CELL-E	1,50	LED COB-3838lm-4000K-90°-CRI 92	40 W	WHITE
22160510-31	CLD CELL-E	1,50	LED COB-2898lm-3000K-90°-CRI 92	32 W	WHITE
22160511-31	CLD CELL-E	1,50	LED COB-3095lm-4000K-90°-CRI 92	32 W	WHITE
22160512-31	CLD CELL-E	1,50	LED COB-3594lm-3000K-90°-CRI 92	40 W	WHITE
22160513-31	CLD CELL-E	1,50	LED COB-3838lm-4000K-90°-CRI 92	40 W	WHITE



Download
 DXF 2D
 - velvet5.dxf
 Montaggi
 - VELVET rev13.pdf
 BIM
 - Velvet 5 - COB - 20200224.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated