


Velvet 5 - LED VIVID

Housing: in die cast aluminium with glass Reflector: dark light optics in high gloss, anti-glare aluminium to optimise light efficiency.
 Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 80%: 50.000h (L80B20)
 recessed Ø 180/190mm



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22160512-05	CLD CELL	1.10	LED COB VIVID-3451lm-3000K-90°-CRI>95	46 W	WHITE

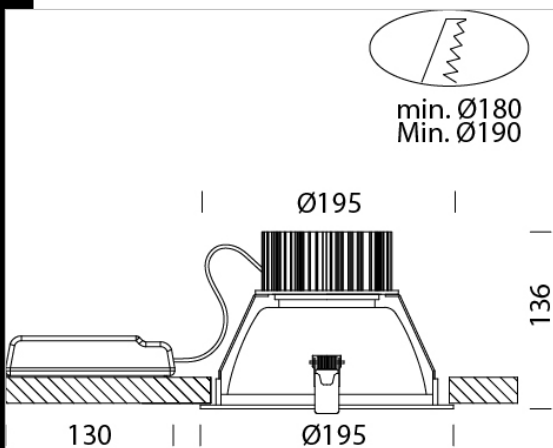

Download

- DXF 2D
- velvet5.dxf
- Montaggi
- VELVET Rev12.pdf
- BIM
- Velvet 5 - LED VIVID - 20200224.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated