

Studio 193 UGR<19

Housing: in die cast aluminium with clear PMMA diffuser.
 Reflector: oxidised and polished aluminium.
 LED: Luminous flux maintenance 80%: 50.000h (L80B20).
 Power factor >0.9.

Photobiological safety class: Exempt group.


Upon request:

- available DIMM-DALI version.
- CASAMBI version, an advanced automation lighting control system (40W max.).



Download

- DXF 2D
 - studio193.dxf
- Montaggi
 - STUDIO rev6.pdf
- BIM
 - Studio 193 - 20200716.zip

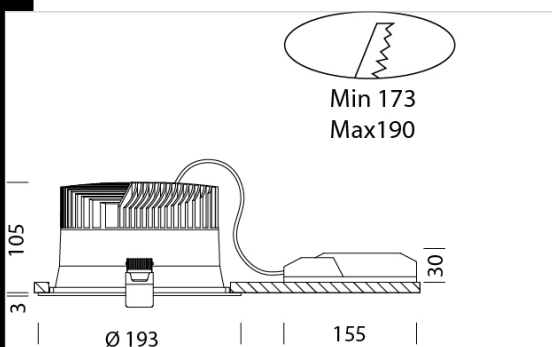

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22161010-00	CLD	1,10	LED COB-3377lm-4000K-CRI>90	32 W	WHITE
22161010-39	CLD	1,10	LED COB-3221lm-3000K-CRI>90	32 W	WHITE

Accessori



- EM Kit Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated