


Studio 220 UGR<19

Housing: in die cast aluminium with clear PMMA diffuser.
 Reflector: oxidised and polished aluminium.
 LED: Luminous flux maintenance 80%: 50.000h (L80B20).
 Power factor >0.9.

Photobiological safety class: Exempt group.

Upon request:

- available DIMM-DALI version.
- CASAMBI version, an advanced automation lighting control system (40W max.).

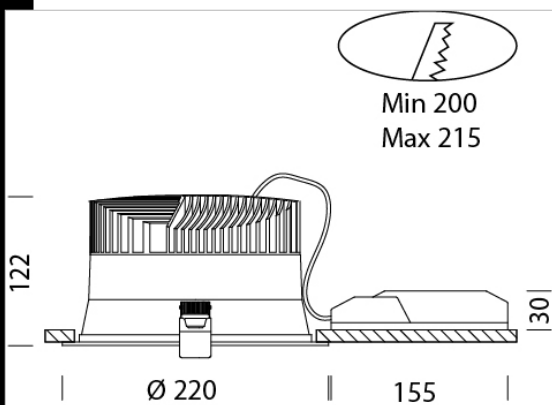

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22161110-00	CLD	1,54	LED COB-4198lm-4000K-CRI>90	40 W	WHITE
22161110-39	CLD	1,60	LED COB-4005lm-3000K-CRI>90	40 W	WHITE

Accessori



- EM Kit Q



Download

- DXF 2D
 - studio220.dxf
- Montaggi
 - STUDIO rev6.pdf
- BIM
 - Studio 220 - 20200716.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated