


Studio B 220 - CRI 92

Housing: in die cast aluminium with clear polycarbonate diffuser. Reflector: optics in high gloss, anti-glare aluminium to optimise light efficiency. Lens: in PMMA with high efficiency output and very low glare rate. Luminous flux maintenance L80B20: 50.000h. Power factor >0.9.

Upon request:

- available DIMM-DALI version.
- CASAMBI version, an advanced automation lighting control system (40W max.).

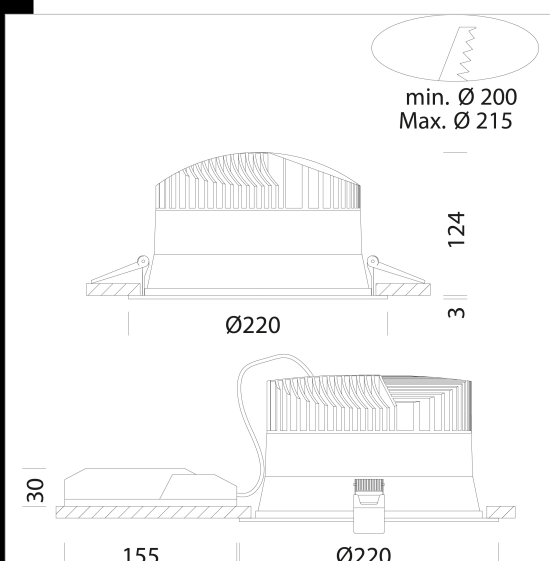

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22161111-00	CLD	1,53	LED COB-4667lm-4000K-CRI>90	40 W	WHITE
22161111-39	CLD	1,53	LED COB-4340lm-3000K-CRI>90	40 W	WHITE

Accessori



- EM Kit Q



Download

DXF 2D
- studiob220.dxf

Montaggi
- STUDIO rev5.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated