



Download


DXF 2D
- techno165.dxf

Montaggi
- TECHNO B rev3.pdf



Techno B 165 - TOTAL WHITE

Housing: in die cast aluminium with clear polycarbonate diffuser.
Reflector: white oxidised smooth optics. Lens: in PMMA with high efficiency output and very low glare rate. Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.
Coating: dust painted, using polyester epoxy paint to withstand UV rays.
Standard supply: Includes adjustable steel bracket. LED: High-efficiency light sources Luminous flux maintenance 80%: 50.000h (L80B20).
Power factor >0.9 Photobiological safety class: Exempt group.

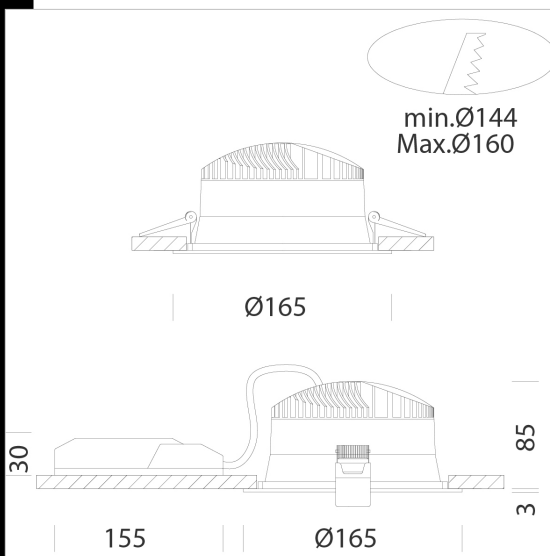

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22163112-00	CLD	0,48	LED COB-2114lm-4000K-CRI 92	22 W	WHITE

Accessori



- EM Kit Q

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated