


## Techno B 245 - TOTAL WHITE

Housing: in die cast aluminium with clear polycarbonate diffuser.  
 Reflector: white oxidised smooth optics. Lens: in PMMA with high efficiency output and very low glare rate. Installation: is equipped with galvanised steel support brackets, with housing for springs for attachment to the false ceilings.  
 Coating: dust painted, using polyester epoxy paint to withstand UV rays.  
 Standard supply: Includes adjustable steel bracket. LED: High-efficiency light sources Luminous flux maintenance 80%: 50.000h (L80B20).  
 Power factor >0.9 Photobiological safety class: Exempt group.

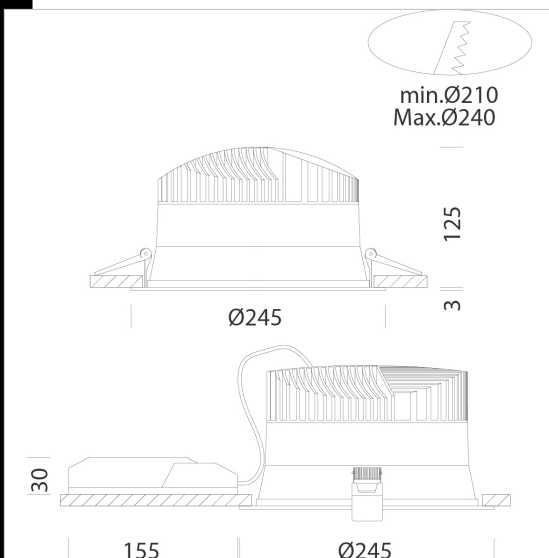

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22163412-00	CLD	1,57	LED COB-5529lm-4000K-CRI 92	55 W	WHITE

### Accessori



- EM Kit Q



### Download

DXF 2D  
 - techno245.dxf

Montaggi  
 - TECHNO B rev3.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated