




Download

DXF 2D
- it2.dxf
Montaggi
- ISPOT TECH REV6.pdf



iSpot Tech 2 - DIMM asymmetric

Housing: Die-cast aluminium
Reflector: In metalized polycarbonate to high rendering.
Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards
Power factor: ≥ 0.9
Luminous flux maintenance 80%: 50.000h (L80B20).
Photobiological safety class: exempt group EN62471.

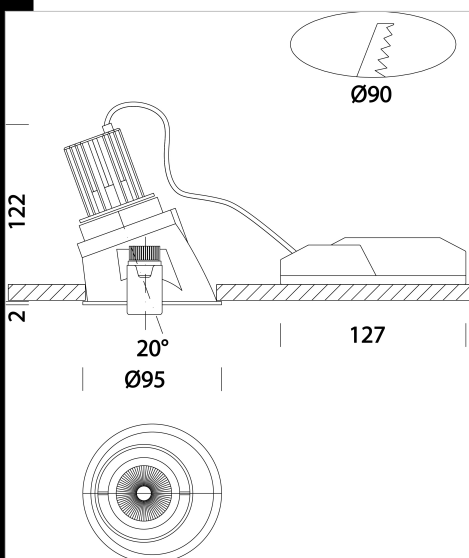

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22167110-00	CLD-DI	0.43	LED COB-584lm-3000K-38°-CRI 92	10 W	WHITE
22167111-00	CLD-DI	0.46	LED COB-604lm-4000K-38°-CRI 92	10 W	WHITE

Accessories



- fluted screen - iSpotTech



- prismatic glass - iSpotTech



- Protective grig

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated