


Download
 DXF 2D
 - il3.dxf
 Montaggi
 - ISPOT TECH REV6.pdf



iSpot Tech 3 - swivelling

Housing: Die-cast aluminium
 Reflector: In metalized polycarbonate to high rendering.
 Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards
 Power factor: ≥ 0.9
 Luminous flux maintenance 80%: 50.000h (L80B20).
 Photobiological safety class: exempt group EN62471.
 recessed $\varnothing 90$ mm

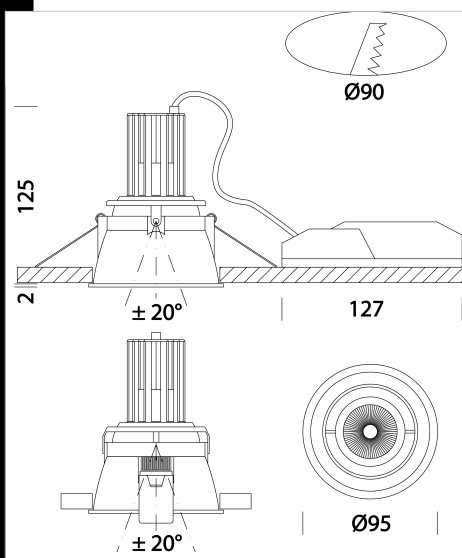

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22167210-00	CLD	0.46	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22167211-00	CLD	0.44	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated