

iSpot Tech 3 - swivelling

Housing: Die-cast aluminium


Reflector: In metalized polycarbonate to high rendering.

Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards

Power factor: ≥ 0.9

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.
recessed Ø 90mm

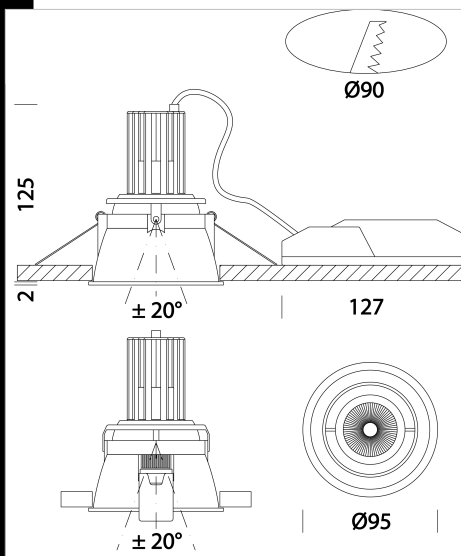

Download

DXF 2D
- it3.dxf

Montaggi
- ISPOT_Tech-1-2-3 rev4.pdf

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22167210-00	CLD CELL-DI	0.46	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22167211-00	CLD CELL-DI	0.44	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22167210-1241	CLD CELL-D-D	0.40	LED COB-957lm-3000K-38°-CRI 92	12 W	WHITE
22167211-1241	CLD CELL-D-D	0.44	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22167210-09	CLD CELL-DI-E	0.90	LED COB-957lm-3000K-38°-CRI 92	12 W	WHITE
22167211-09	CLD CELL-DI-E	0.85	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE
22167210-31	CLD CELL-DI-E	0.85	LED COB-957lm-3000K-38°-CRI 92	10 W	WHITE
22167211-31	CLD CELL-DI-E	0.85	LED COB-990lm-4000K-38°-CRI 92	10 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated