



Download

DXF 2D
- ispota22.dxf

Montaggi
- ISPOT_ARCHITECTURAL_1-2
REV1.pdf



iSpot Architectural 2

Housing: Die-cast aluminium

Lens: in PMMA with high efficiency output and very low glare rate.


Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards

Power factor: >= 0.9

Luminous flux maintenance 80%: 50.000h (L80B20).

Photobiological safety class: exempt group EN62471.

recessed Ø 96/100mm

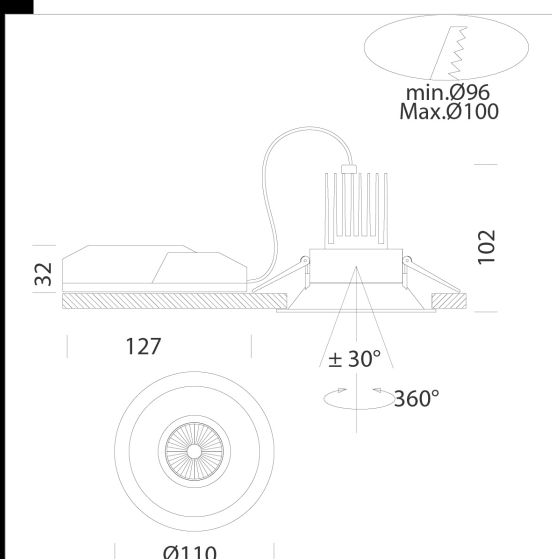

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22167410-00	CLD CELL-DI	0.41	LED COB-957lm-3000K-60°-CRI 92	10 W	WHITE
22167411-00	CLD CELL-DI	0.40	LED COB-990lm-4000K-60°-CRI 92	10 W	WHITE
22167410-1241	CLD CELL-D-D	0.37	LED COB-957lm-3000K-60°-CRI 92	10 W	WHITE
22167411-1241	CLD CELL-D-D	0.40	LED COB-990lm-4000K-60°-CRI 92	10 W	WHITE
22167410-09	CLD CELL-DI-E	0.85	LED COB-957lm-3000K-60°-CRI 92	10 W	WHITE
22167411-09	CLD CELL-DI-E	0.85	LED COB-990lm-4000K-60°-CRI 92	10 W	WHITE
22167410-31	CLD CELL-DI-E	0.85	LED COB-957lm-3000K-60°-CRI 92	10 W	WHITE
22167411-31	CLD CELL-DI-E	0.85	LED COB-990lm-4000K-60°-CRI 92	10 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated