


## iSpot Professional 1 - DIMM



Housing: Die-cast aluminium  
 Reflector: In metalized polycarbonate to high rendering.  
 Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards  
 LED COB 9W - 3000K - 870lm - CRI 92 - 60°  
 LED COB 9W - 4000K - 900lm - CRI 92 - 60°  
 Power factor: >= 0.9  
 Luminous flux maintenance 70% 50000h (L70B50)  
 Photobiological safety class: exempt group EN62471.

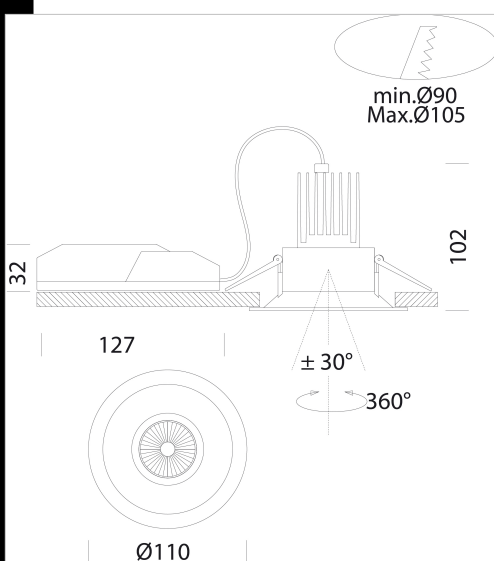

Code	Gear	Kg	Watt	Base	Lamps	Colour
22167510-00	CLD CELL-DI	0,42	LED COB 9W		870lm-3000K - 60°-CRI 92	WHITE
22167511-00	CLD CELL-DI	0,43	LED COB 9W		900lm-4000K - 60°-CRI 92	WHITE

- 360°
- v.a. IP20
- HOTEL
- Recycling symbol
- CE
- U.V.
- House icon
- Person icon
- Shopping bag icon
- Triangle icon
- DIMM
- Colour quality
- IK04
- v.l. IP44
- CLD CELL-D
- RGO
- 30°

Download  
 DXF 2D  
 - ispotp.dxf