


iSpot Professional 2 - DIMM



Housing: Die-cast aluminium
 Reflector: In metalized polycarbonate to high rendering.
 Regulations: Produced according to applicable EN60598 - CEI 34 - 21 standards, degree of protection according to EN 60529 standards
 LED COB 9W - 3000K - 870lm - CRI 92 - 60°
 LED COB 9W - 4000K - 900lm - CRI 92 - 60°
 Power factor: >= 0.9
 Luminous flux maintenance 70% 50000h (L70B50)
 Photobiological safety class: exempt group EN62471.

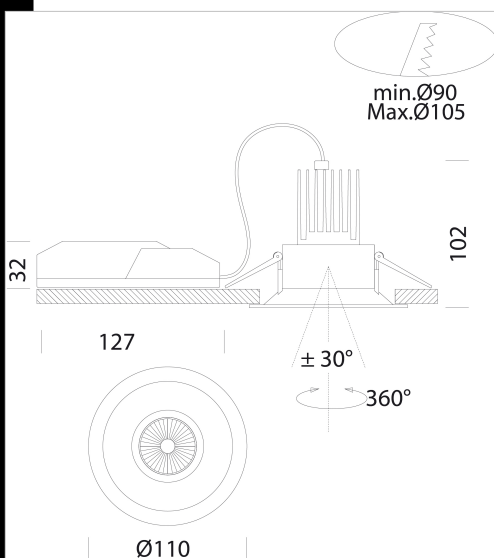

Code	Gear	Kg	Watt	Base	Lamps	Colour
22167610-00	CLD CELL-DI	0,40	LED COB 9W		870lm-3000K - 60°-CRI 92	WHITE
22167611-00	CLD CELL-DI	0,41	LED COB 9W		900lm-4000K - 60°-CRI 92	WHITE

- 360°
- v.a. IP20
- HOTEL
- Recycling
- CE
- U.V.
- Household
- Colour quality
- IK04
- v.l. IP44
- CLD CELL-D
- RGO
- 30°

Download
 DXF 2D
 - ispotp.dxf