




Download

DXF 2D
- slim1p.dxf
Montaggi
- SLIM_LEX_1P-2P rev3.pdf



Slim Lex 1.0 P

Housing: in die cast aluminium
 Diffuser: polycarbonate
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 50.000h (L70).
 recessed Ø 150/160mm

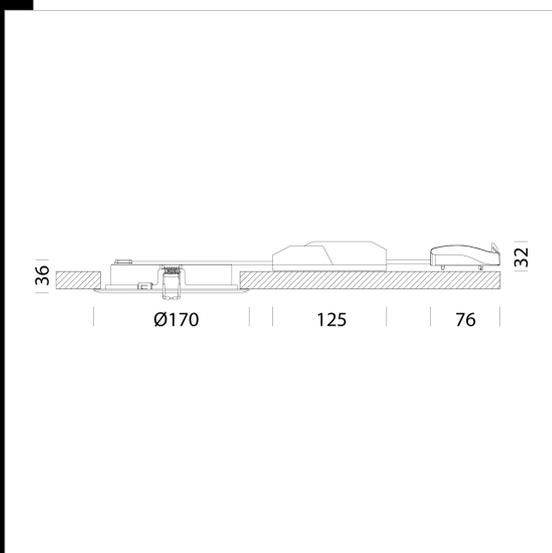

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22169510-00	CLD	1,03	LED-2132lm-4000K-CRI80	19 W	WHITE
22169510-39	CLD	1,03	LED-2070lm-3000K-CRI80	19 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated