




**Download**

DXF 2D  
- slim2p.dxf  
  
Montaggi  
- SLIM\_LEX\_1P-2P rev3.pdf



**Slim Lex 2.0 P**

Housing: in die cast aluminium  
Diffuser: polycarbonate  
Painting: dust painted, using polyester epoxy paint to withstand UV rays.  
Standard supply: Includes adjustable steel bracket.  
Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.  
Photobiological safety class: Exempt group.  
Luminous flux maintenance 70%: 50.000h (L70).  
recessed Ø 200/210mm

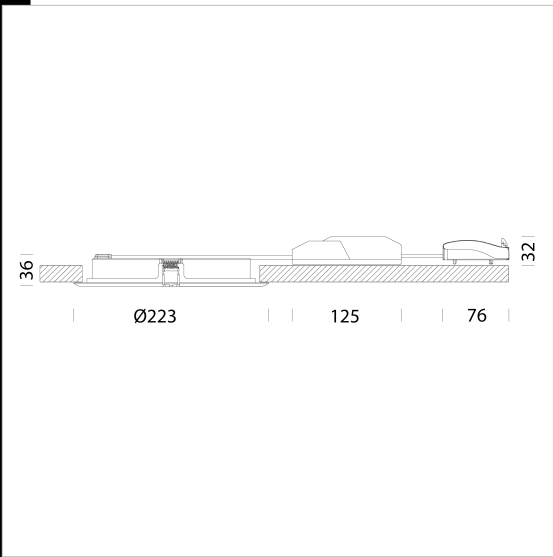

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22169610-00	CLD	1,03	LED-2215lm-4000K-CRI80	19 W	WHITE
22169610-39	CLD	1,03	LED-2150lm-3000K-CRI80	19 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated