



Argostar 1

Thanks to its fixture's extremely clean and functional design, it can be installed in any architectural context.

Housing: V2 self-extinguishing, UV-stabilized, anti-yellowing polycarbonate.
Diffuser: Includes a prismatic opal polycarbonate cone and a clear coloured ring.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply. 2P wire, 0.75 sqmm cross section.
Polycarbonate terminal block (maximum allowed lead cross section 2.5 sqmm.)

Equipment: Includes stainless steel springs ensuring perfect adherence to 5 to 37 mm. thick false ceilings

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


Download

DXF 2D
- 171173.dxf

3DS
- fosnova_argostar_1_recessed.3ds

3DM
- fosnova_argostar_1_recessed.3dm

Montaggi
- 771707_argostar.pdf

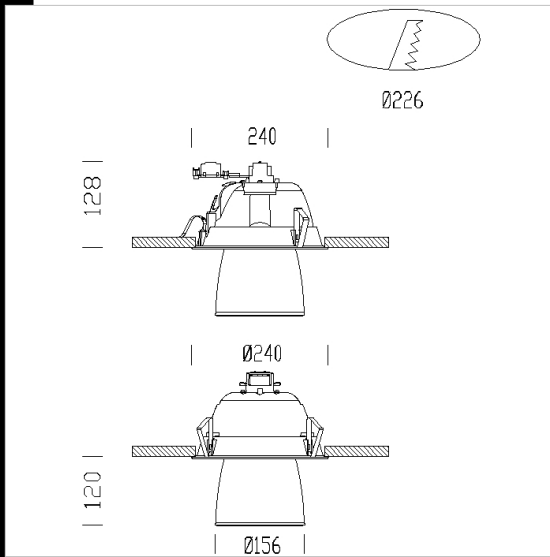

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
22171173-00	S	0.93	FLC EL max23-1500lm-4000K-Ra 1b	0 W	E27	ALUMINIUM

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated