


## Energy 2245

Housing: in die-cast aluminium.  
 Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED  
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.  
 Standard supply: Includes adjustable steel bracket.  
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.  
 LED: high-efficiency light sources 2100/2180lm - 21W - 3000/4000K - CRI 90  
 Power factor:  $\geq 0.9$   
 Photobiological safety class: Exempt group.  
 Luminous flux maintenance 70%: 40.000h (L70B50).  
 recessed  $\varnothing$  200/240mm

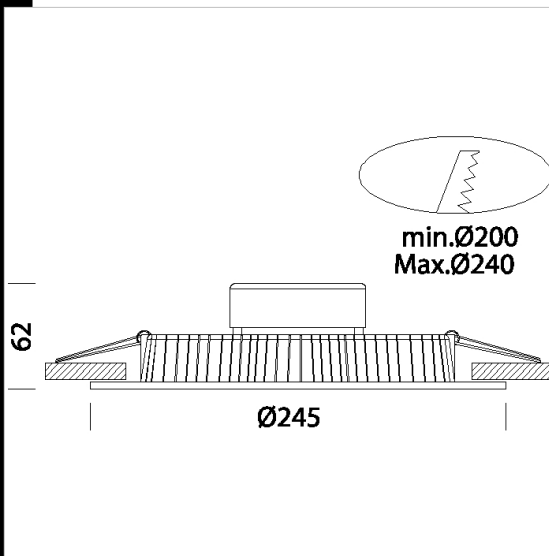

Code	Gear	Kg	Watt	Base	Lamps	Colour
22172210-00	CLD CELL	0,90	LED white 20W	-	2180lm-4000K-CRI 90	WHITE
22172213-00	CLD CELL	0,90	LED white 20W	-	2100lm-3000K-CRI 90	WHITE

### Accessories



- Presence and light sensor

- HOTEL ★★ ★★
- CLD CELL
- Recycling symbol
- 
- ▽
- CE
- EL
- UV
- Hand icon
- House icon
- Person icon
- A+B=
- Person icon
- Person icon
- Shopping bag icon
- Person icon
- Person icon
- LOW FLICKER
- Colour quality
- IK07
- v.l. IP44
- Shopping cart icon
- Person on bike icon
- RG0
- v.a. IP20

### Download

DXF 2D  
 - en2245.dxf  
 - en2245.dxf

Montaggi  
 - energy\_.pdf