


Energy 2245 B

Housing: in die-cast aluminium.
 Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Power factor: ≥ 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 70%: 33.000h (L70B50).
 recessed \varnothing 200/240mm



Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22172219-00	CLD CELL	0.74	LED-2200lm-3000K-CRI 90	23 W	BIANCO
22172218-00	CLD CELL	0.73	LED-2300lm-4000K-CRI 90	20 W	BIANCO

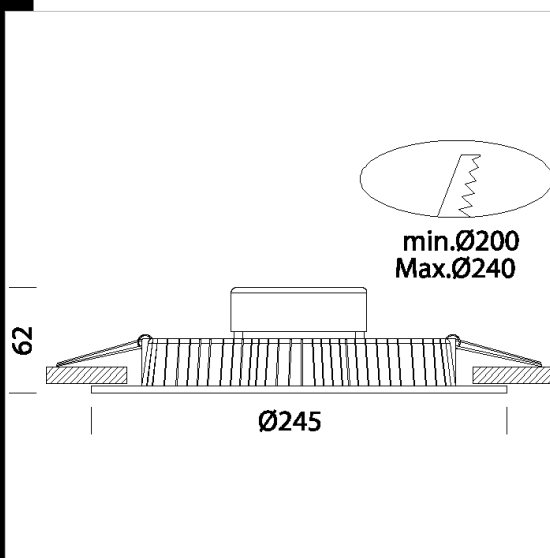

Download

DXF 2D
 - en2245.dxf

Montaggi
 - ENERGY_LED.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated