


## info@fosnova.it - http://www.fosnova.it

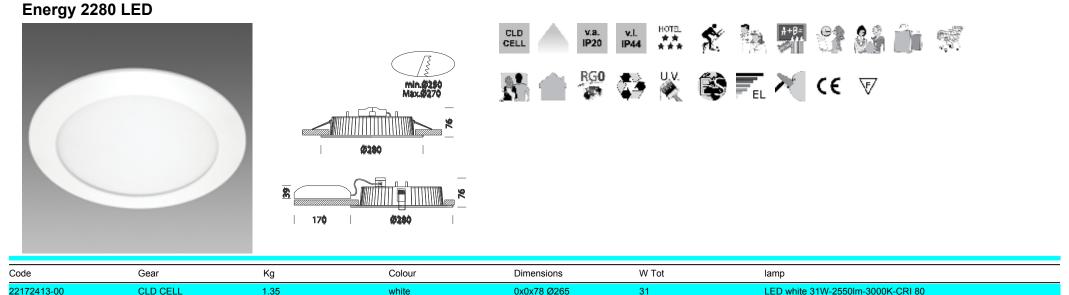

22172413-00	CLD CELL	1.35	white	0x0x78 Ø265	31	LED white 31W-2550Im-3000K-CRI 80
22172410-00	CLD CELL	1.35	white	0x0x78 Ø265	31	LED white 31W-2850Im-4000K-CRI 80

Energy, one of the most popular and top-selling ranges of recessed spotlights, announces upgraded features with the same amazing quality. The new series is now available with 3000/4000K LED sources with lumen outputs from 600 Im to 2850 Im, and diameters from 100 mm to 280 mm, also featuring a protection rating of IP44 and life of 40,000 hours. These spotlights are particularly suited for the retrofitting of old lighting systems, and are designed to fit holes with diameters ranging from 78 mm to 270 mm in order to perfectly cover pre-existing mounting holes.

Housing: in die-cast aluminium.

Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

LED: high-efficiency light sources 2550/2800lm - 36W - 4000K - CRI 80

Power factor: ≥ 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 70%: 40.000h (L70B50).

recessed Ø 250/270mm