



Download

DXF 2D
- energy2180.dxf

Montaggi
- energy_.pdf



Energy 2180 - DIMM

Housing: in die-cast aluminium.

Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


LED: high-efficiency light sources 1350/1500lm - 18W - 3000/4000K - CRI 90 - DIM IGBT (dimmer must be equipped with adjustment for minimum brightness level)

Power factor: ≥ 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 70%: 40.000h (L70B50).

recessed Ø 150/175mm

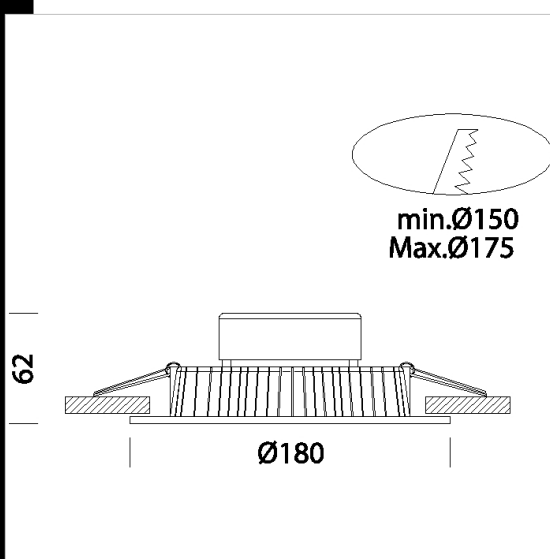

Code	Gear	Kg	Watt	Base	Lamps	Colour
22172513-00	CLD CELL-DI	0,60	LED white 15W	-	1350lm-3000K-CRI 90	WHITE
22172510-00	CLD CELL-DI	0,60	LED white 15W	-	1500lm-4000K-CRI 90	WHITE

Accessori



- Presence and light sensor