

## Eco Lex 3 B

Housing: in die cast aluminium

Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: 0.9

Photobiological safety class: Exempt group.


Luminous flux maintenance 80%: 33.000h (L80B20).

recessed Ø 198/216mm

### Download

DXF 2D  
- ecolex3.dxf

Montaggi  
- ECO\_LEX\_LED rev12.pdf

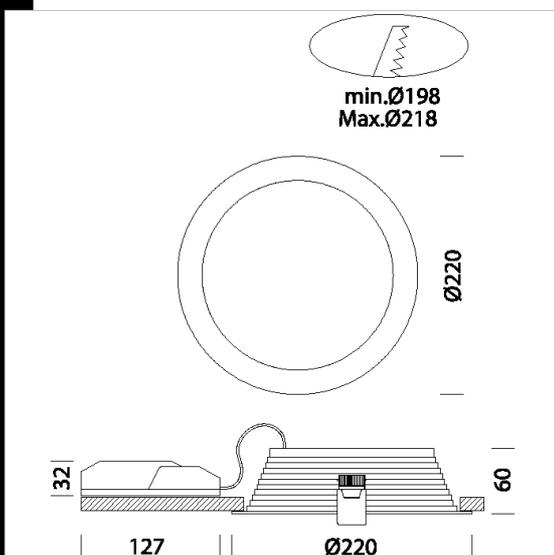

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22172908-00	CLD	0,80	LED-2050lm-4000K-CRI>90	21 W	WHITE
22172909-00	CLD	0,80	LED-1950lm-3000K-CRI>90	21 W	WHITE

### Accessori



- EM Kit Q



- Protective grig - Eco Lex

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated