


## Lex LED 110/277V - DIMM



Housing: in die cast aluminium  
 Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare  
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.  
 Standard supply: Includes adjustable steel bracket.  
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

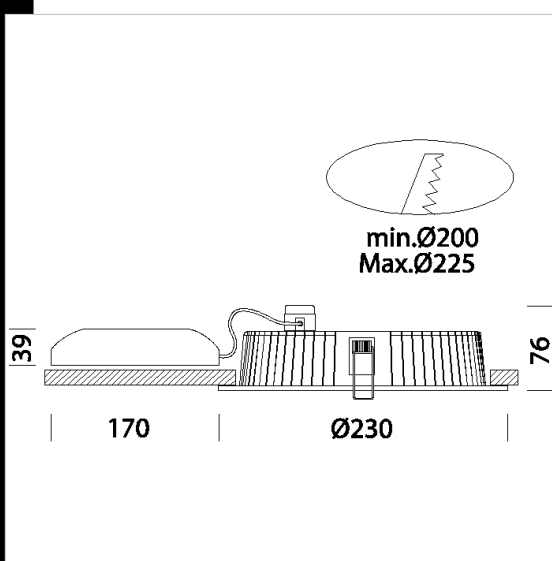

Code	Gear	Kg	Watt	Base	Lamps	Colour
22173418-00	CLD CELL-D	1,00	LED white 30W led 110-277		3000lm-4000K-CRI 90	WHITE
22173414-00	CLD CELL-D	1,00	LED white 21W		2000lm-4000K-CRI 90	WHITE
22173411-00	CLD CELL-D	1,00	LED white 21W		2000lm-3000K-CRI 90	WHITE
22173417-00	CLD CELL-D	1,00	LED white 30W led 110-277		3000lm-3000K-CRI 90	WHITE



Download  
 DXF 2D  
 - enb2230.dxf