

Comfort Lex LED - shielded

A new series of the popular and top-quality LEX recessed spotlights, very small and very small height suitable for countertops with limited space.

Housing: in die cast aluminium

Diffuser: panel in PMMA, 6 mm thick, with laser silk-screening suitably dimensioned based on the power level of the LED

Reflector: V2 self-extinguishing polycarbonate; aluminium powder coated through a C.V.D. hard-vacuum process for greater light control and efficiency.

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.


LED: high-efficiency light sources 2250m - 4000K - CRI 90 - IP44. DIM IGBT

Power factor: 0.9

Photobiological safety class: Exempt group.


Luminous flux maintenance 70%: 50.000h (L70B50).

recessed Ø 215/235mm

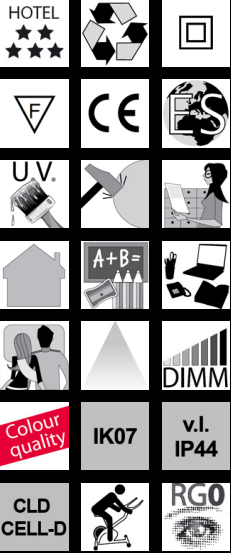

v.a.
IP20

Download
DXF 2D
- lexscher.dxf

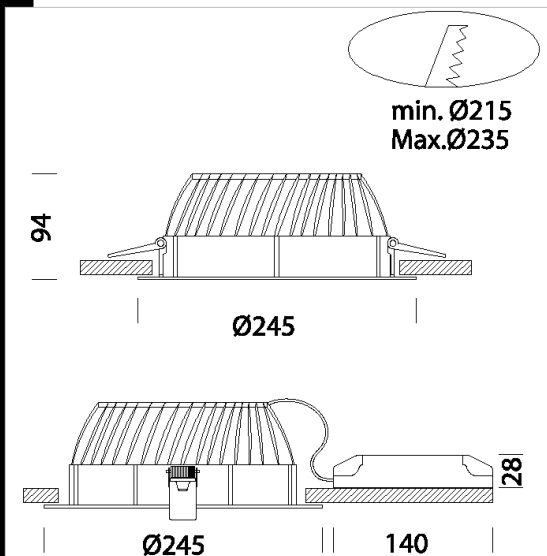

Code	Gear	Kg	Watt	Base	Lamps	Colour
22173412-00	CLD CELL-DI	1,10	LED white 18W	-	2250lm-3000K-CRI 90	WHITE
22173413-00	CLD CELL-DI	1,10	LED white 18W	-	2250lm-4000K-CRI 90	WHITE

Accessories



- Presence and light sensor