

Efficiency Lex LED - DIMM

A new series of the popular and top-quality LEX recessed spotlights, very small and very small height suitable for countertops with limited space.

Housing: in die cast aluminium

Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.


LED: high-efficiency light sources 2250lm - 3000/4000K - CRI 90 - IP44. DIM IGBT

Power factor: 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 70%: 50.000h (L70B50).

recessed Ø 198/216mm

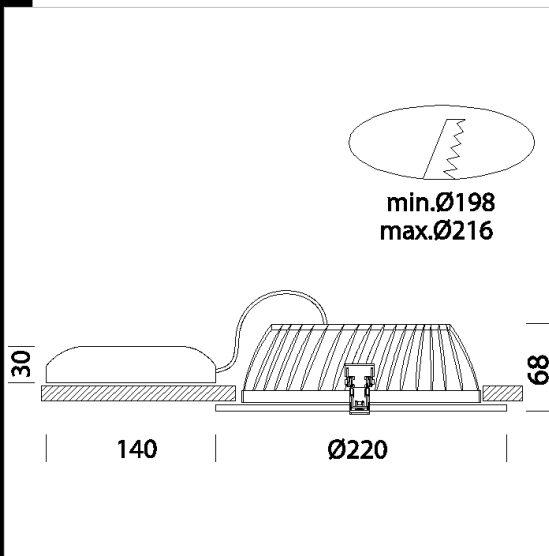

Code	Gear	Kg	Watt	Base	Lamps	Colour
22173416-00	CLD CELL-DI	0,72	LED white 18W	-	2250lm-3000K-CRI 90	WHITE
22173415-00	CLD CELL-DI	0,72	LED white 18W	-	2250lm-4000K-CRI 90	WHITE

Accessories



- Presence and light sensor



Download

DXF 2D
- lexledip.dxf