


TecnoLex LED



Housing: in die cast aluminium
 Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Power factor: 0.9
 Luminous flux maintenance 70%: 50.000h (L70B50).

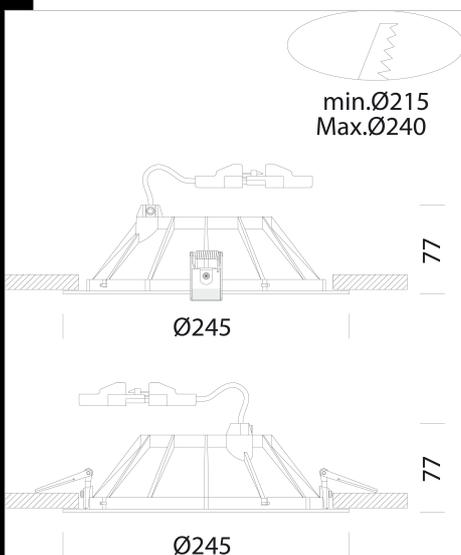

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22173611-00	CLD	0,71	LED-2770lm-4000K-CRI 80	27 W	WHITE
22173610-00	CLD	0,71	LED-2576lm-3000K-CRI 80	27 W	WHITE



Download

DXF 2D
 - tecnolex.dxf

Montaggi
 - TECNOLEX rev2.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated