



Download

DXF 2D
- ecolex6.dxf

Montaggi
- ECO_LEX_LED rev12.pdf



Eco Lex 6 - CRI 95

Housing: in die cast aluminium

Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare

Painting: dust painted, using polyester epoxy paint to withstand UV rays.

Standard supply: Includes adjustable steel bracket.


Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Power factor: 0.9

Photobiological safety class: Exempt group.

Luminous flux maintenance 80%: 50.000h (L80B20).

recessed Ø 220/240mm

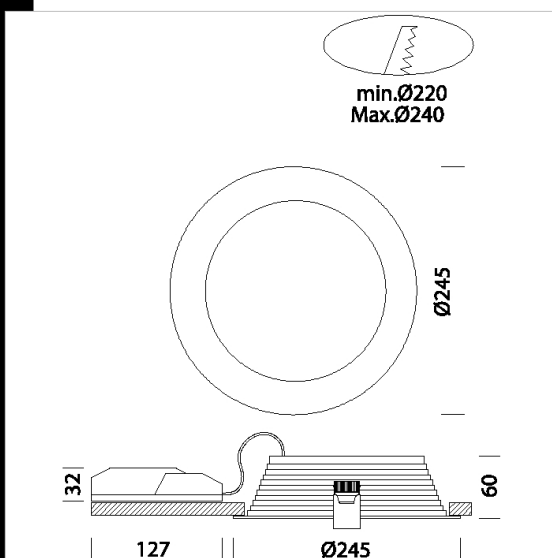

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22174901-00	CLD CELL	0,98	LED-2036lm-4000K-CRI 95	21 W	WHITE
22174902-00	CLD CELL	1,02	LED-1893lm-3000K-CRI 95	21 W	WHITE
22174901-1241	CLD CELL-D-D	0,96	LED-2036lm-4000K-CRI 95	21 W	WHITE
22174902-1241	CLD CELL-D-D	0,96	LED-1893lm-3000K-CRI 95	23 W	WHITE
22174901-09	CLD CELL-DI-E	0,98	LED-2036lm-4000K-CRI 95	21 W	WHITE
22174902-09	CLD CELL-E	1,48	LED-1893lm-3000K-CRI 95	21 W	WHITE
22174901-31	CLD CELL-E	1,50	LED-2036lm-4000K-CRI 95	21 W	WHITE
22174902-31	CLD CELL-E	1,50	LED-1893lm-3000K-CRI 95	21 W	WHITE

Accessori



- EM Kit Q



- Protective grig - Eco Lex

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated