


Eco Lex Q3

Housing: in die cast aluminium
 Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.
 Standard supply: Includes adjustable steel bracket.
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.
 Power factor: 0.9
 Photobiological safety class: Exempt group.
 Luminous flux maintenance 80%: 40.000h (L80B20).

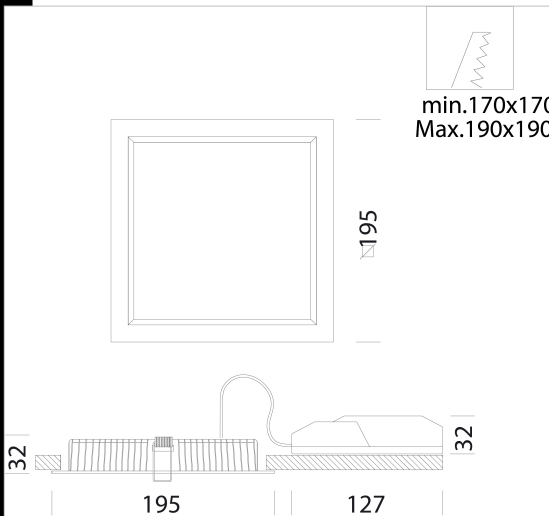

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22175810-00	CLD CELL	0.65	LED-2135lm-4000K-CRI 90	25 W	WHITE
22175811-00	CLD CELL	0.65	LED-2025lm-3000K-CRI 90	25 W	WHITE
22175810-1241	CLD CELL-D-D	0.75	LED-2135lm-4000K-CRI 90	25 W	WHITE
22175811-1241	CLD CELL-D-D	0.77	LED-2025lm-3000K-CRI 90	25 W	WHITE
22175810-09	CLD CELL-E	1.13	LED-2135lm-4000K-CRI 90	25 W	WHITE
22175811-09	CLD CELL-E	1.13	LED-2025lm-3000K-CRI 90	25 W	WHITE
22175810-31	CLD CELL-E	1.15	LED-2135lm-4000K-CRI 90	25 W	WHITE
22175811-31	CLD CELL-E	1.15	LED-2025lm-3000K-CRI 90	25 W	WHITE

Accessories



- EM Kit Q



Download

DXF 2D
 - ecolexq3.dxf

Montaggi
 - ECO_LEX_Q rev4.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated