


## Eco Lex Q4



Housing: in die cast aluminium  
 Diffuser: The shield consists of a laser-cut slab that serves as a lens for its effect of concentric circles. These decorations create a pattern, with variable distances; the closer they get to the centre, the closer they come together achieving excellent visual comfort without glare  
 Painting: dust painted, using polyester epoxy paint to withstand UV rays.  
 Standard supply: Includes adjustable steel bracket.  
 Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.  
 Power factor: 0.9  
 Photobiological safety class: Exempt group.  
 Luminous flux maintenance 80%: 40.000h (L80B20).

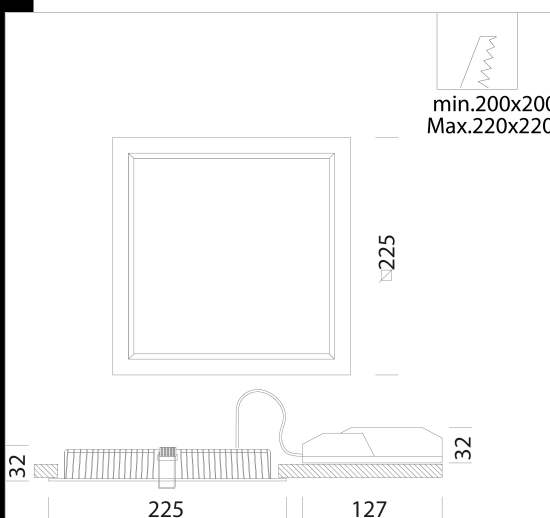


Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22175910-00	CLD CELL	0,86	LED-2775lm-4000K-CRI 90	33 W	WHITE
22175911-00	CLD CELL	0,85	LED-2670lm-3000K-CRI 90	33 W	WHITE
22175910-1241	CLD CELL-D-D	0,97	LED-2775lm-4000K-CRI 90	33 W	WHITE
22175911-1241	CLD CELL-D-D	1,01	LED-2670lm-3000K-CRI 90	34 W	WHITE
22175910-09	CLD CELL-E	1,35	LED-2775lm-4000K-CRI 90	34 W	WHITE
22175910-31	CLD CELL-E	1,35	LED-2775lm-4000K-CRI 90	33 W	WHITE
22175911-09	CLD CELL-E	1,33	LED-2670lm-3000K-CRI 90	34 W	WHITE
22175911-31	CLD CELL-E	1,35	LED-2670lm-3000K-CRI 90	33 W	WHITE

### Accessori



- EM Kit Q

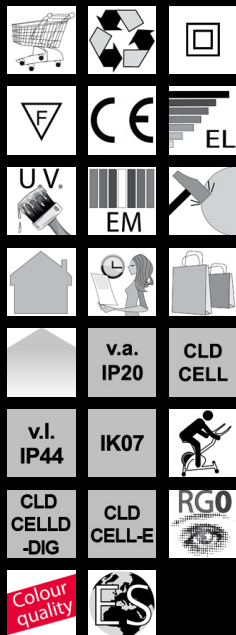

### Download

DXF 2D  
 - ecolexq42.dxf

Montaggi  
 - ECO\_LEX\_Q\_rev4.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated