



**Download**


DXF 2D  
- roda.dxf

Montaggi  
- Roda Basic rev0.pdf



## 1784 Roda Basic

Housing/diffuser: in extruded, shatterproof and self-extinguishing polycarbonate, UV-stabilized. Equipment: steel brackets to mount the product as a ceiling fixture or a suspended lamp. With quick connector. The fixture is secured to the brackets with a quick clamping mechanism. For installations with direct exposure to sunlight, we recommend using Forma LED. LED: power factor 0.9. Lumen maintenance at 80%: 45000h (L70B50). Photobiological risk class: exempt group.

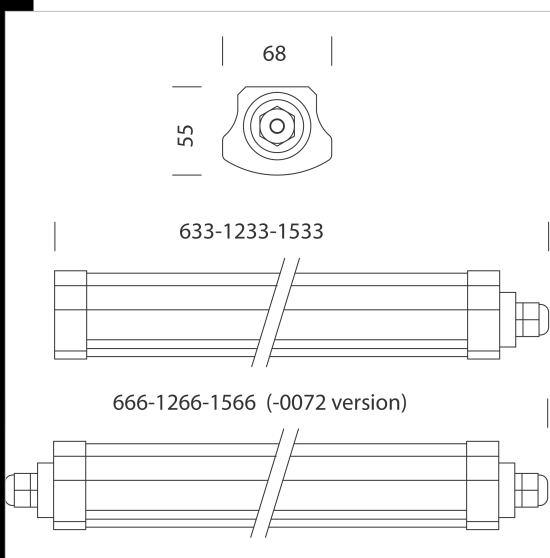

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22178471-00	CLD	0,80	LED-3600lm-4000K-CRI>80	36 W	GREY
22178472-00	CLD	1,10	LED-5000lm-4000K-CRI>80	50 W	GREY
22178470-0072	CLD	0,55	LED-1800lm-4000K-CRI>80	18 W	GREY
22178471-0072	CLD	0,90	LED-3600lm-4000K-CRI>80	36 W	GREY
22178472-0072	CLD	1,20	LED-5000lm-4000K-CRI>80	50 W	GREY

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated