


Download

DXF 2D
- rodatabe.dxf

Montaggi
- Roda rev1.pdf

1785 Roda LED Tube

Housing/diffuser: in shatterproof and self-extinguishing polycarbonate, UV-stabilized. Equipment: stainless steel brackets to mount the product as a ceiling fixture or a pendant lamp. With cable gland. The fixture is secured to the brackets with a quick clamping mechanism. For installations with direct exposure to sunlight, we recommend using Forma LED. Supplied without LED tubes.

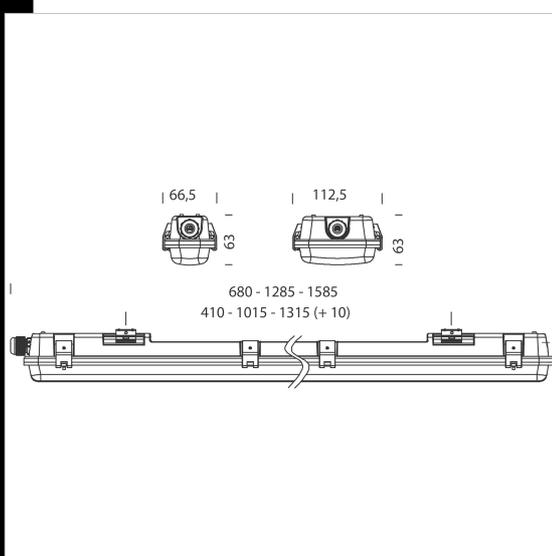

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22178511-00	CLD S	0,60	LED 1x---	0 W	WHITE
22178512-00	CLD S	0,80	LED 1x---	0 W	WHITE
22178513-00	CLD S	0,50	LED 2x---	0 W	WHITE
22178514-00	CLD S	1,00	LED 2x---	0 W	WHITE
22178515-00	CLD S	1,20	LED 2x---	0 W	WHITE

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated