
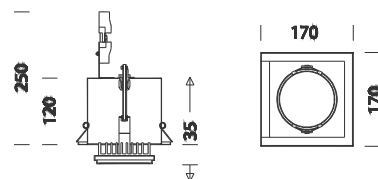


## Shop 1 ESALED

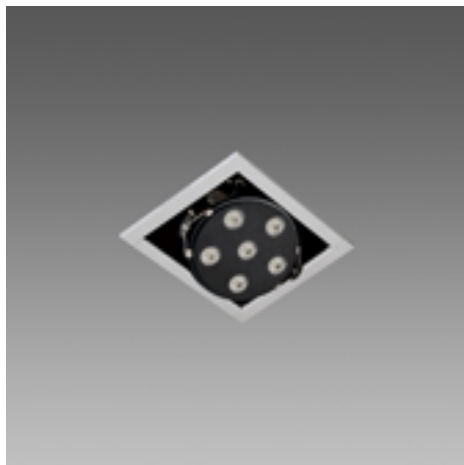

| Code        | Gear     | Kg   | Colour      | Dimensions  | W Tot | lamp                             |
|-------------|----------|------|-------------|-------------|-------|----------------------------------|
| 22180170-00 | CLD CELL | 1.00 | met. silver | 170x170x120 | 18    | ESALED-1800lm-3000K - 40°-CRI 80 |

These adjustable-angle recessed fixtures offer the possibility to move the lamps out of the alignment box (extension system), thus increasing their aiming flexibility.

Ideal in shops, showrooms and exhibition rooms.

Housing: Steel plate.

Coating: Humidity resistant acrylic-resin liquid paint, UV-stabilised.

Electric gear: Equipped with transformer and hard wire, 0.50 sqmm cross section and heat resistance HT sheath, in accordance with CEI 20-20 standards. Terminal block (maximum allowed lead cross section 2.5 sqmm.)

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

ESALED: 3000K - 1050mA - 1800lm - CRI 80