
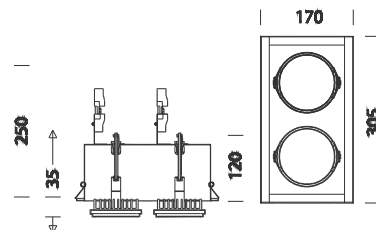


## Shop 2 ESALED

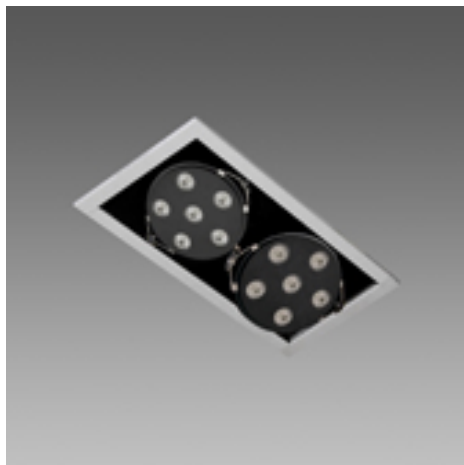

Code	Gear	Kg	Colour	Dimensions	W Tot	lamp
22180171-00	CLD CELL	1.70	met. silver	305x170x120	36	ESALED-1800lm-3000K - 40°-CRI 80
22180270-00		1.60	met. silver	305x170x120	36	ESALED-1800lm-3000K - 40°-CRI 80 CDM-T 35 elite-G12-3900lm-3000K-Ra 90
22180271-00		1.60	met. silver	305x170x120		ESALED-1800lm-3000K - 40°-CRI 80 CDM-T 70 elite-G12-7800lm-3000K-Ra 90

These adjustable-angle recessed fixtures offer the possibility to move the lamps out of the alignment box (extension system), thus increasing their aiming flexibility.

Ideal in shops, showrooms and exhibition rooms.

Housing: Steel plate.

Coating: Humidity resistant acrylic-resin liquid paint, UV-stabilised.

Electric gear: Equipped with transformer and hard wire, 0.50 sqmm cross section and heat resistance HT sheath, in accordance with CEI 20-20 standards. Terminal block (maximum allowed lead cross section 2.5 sqmm.)

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.

ESALED: 3000K - 1050mA - 1800lm - CRI 80